

4K/H.265+ Solution



ONVIF GMSI

Milesight Edge AI Network Camera is developed based on built-in AI engine and Deep Learning technology. The VCA functions, people counting functions of Milesight AI Network Camera are all developed based on AI technology and platform

4G Solar-powered Traffic Sensing Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Optimal Capture Distance	Capture Range	Capture Speed Maximum	IP&IK Rating	Listino €	Caratteristiche
	SC211-EU (1/2.8")	2MP 1920*1080	Fixed Ottica 16mm	H19.4° D22.2° V11°	15m~20m	10m~25m	70km/h	IP66	2.599,00	<ul style="list-style-type: none"> * Support 4G LTE; Nano SIM: SD card, up to 256G; HTTP Protocol * 3-Axis Ball bracket, Anti-theft Mounting Design * Solar-powered supported * 7.2V, 6400mAh, 46.08Wh battery and USB Type-C Power Supply * Built-in High-accuracy GPS Module * Radar Trigger Technology and Intelligent Algorithm Confirmation * Vehicle Capture, Quick Start Capture * Low-power operation mode and working mode switch automatically * Equipped with WIFI for web GUI configuration * Operational Temperature: -20°C ~60°C * IR Wave Length: 850nm (Default) <p>Optional:</p> <ul style="list-style-type: none"> * 6mm lens optional (Entrance & Exit/Turning Recommended) Capture Range: 3~15m Capture Speed Maximum: 30km/h * IR Wave Length: 740nm * Power Adaptor: S6 (DC 5V/2A) * Solar Panel Modules: \$60

Remark:

"-EU" / "-AU" / "-NA" in the Modello refers to different 4G modules in option for different countries / regions. (e.g.)

"-EU": for Europe, Middle East and Africa. "-AU": for Latin America and Australia, New Zealand "-NA": for North America

AI Color+ Series

AI Color+ Vandal-proof Mini Bullet Network Camera


Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	Illumination Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2964-UPD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H109° D125° V61°	Color: 0.001Lux @F1.0	120dB	30m	IP67 IK10	335,00	<ul style="list-style-type: none"> * Full-color Image Performance * F1.0 Super Aperture * Support PoE; SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Video Content Analysis
	MS-C5364-UPD	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H104° D129° V78°	Color: 0.002Lux @F1.0	120dB	30m	IP67 IK10	406,00	<p>Optional:</p> <ul style="list-style-type: none"> * Lens 4mm * High Frame Rate: \$10 (-R Series: 2MP@60fps) * Junction Box: \$5 (Need to be assembled before delivery) * Adapter Plate A64: \$2 (Only for junction box version) * Black Housing: \$10 (MOQ: 10Pcs)
	MS-C8164-UPD	8MP(4K) 3840x2160 @30fps	Fixed Lens 2.8mm	H108° D125° V60°	Color: 0.005Lux @F1.0	120dB	30m	IP67 IK10	487,00	

AI Mini Series

AI IR Mini Dome Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2983-PD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H111° D128° V61°	Color: 0.005Lux @F1.6	120dB	20m	N/A	269,00	<ul style="list-style-type: none"> * Support PoE; Built-in Microphone; SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264; * Video Content Analysis
	MS-C4583-PD	4MP 2688x1520 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.005Lux @F1.6	120dB	20m	N/A	316,00	
	MS-C5383-PD MS-C5383-PC/N	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	20m	N/A	340,00	
	MS-C8183-PD	8MP(4K) 3840*2160 @30fps	Fixed Lens 2.8mm	H110° D126° V60°	Color: 0.012Lux @F1.6	120dB	20m	N/A	425,00	

AI Vandal-proof Mini Dome Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2973-PD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H111° D128° V61°	Color: 0.005Lux @F1.6	120dB	30m	IP67 IK10	269,00	<ul style="list-style-type: none"> * Support PoE; Built-in Microphone; SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264; * Video Content Analysis
	MS-C4573-PD	4MP 2688x1520 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.005Lux @F1.6	120dB	30m	IP67 IK10	317,00	
	MS-C5373-PD	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	30m	IP67 IK10	340,00	
	MS-C8173-PD	8MP(4K) 3840*2160 @30fps	Fixed Lens 2.8mm	H110° D126° V60°	Color: 0.012Lux @F1.6	120dB	30m	IP67 IK10	425,00	


AI Vandal-proof Mini Bullet Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2964-PD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H111° D128° V61°	Color: 0.005Lux @F1.6	120dB	30m	IP67 IK10	279,00	<ul style="list-style-type: none"> * Support PoE; SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Video Content Analysis
	STOCK MS-C4564-PD	4MP 2688x1520 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.005Lux @F1.6	120dB	30m	IP67 IK10	326,00	
	STOCK MS-C5364-PD-JB MS-C5364-PD-JB/N	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	30m	IP67 IK10	425,00	
	STOCK MS-C8164-PD-JB	8MP(4K) 3840x2160 @30fps	Fixed Lens 2.8mm	H110° D126° V60°	Color: 0.012Lux @F1.6	120dB	30m	IP67 IK10	458,00	

AI Weather-proof Mini Dome Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2975-PD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H111° D128° V61°	Color: 0.005Lux @F1.6	120dB	25m	IP67 IK10	293,00	<ul style="list-style-type: none"> * Support PoE; Built-in Microphone; SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264; * Video Content Analysis
	STOCK MS-C4575-PD	4MP 2688x1520 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.005Lux @F1.6	120dB	25m	IP67 IK10	335,00	
	STOCK MS-C5375-PD-JB MS-C5375-PD-JB/N	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	25m	IP67 IK10	411,00	
	STOCK MS-C8175-PD-JB	8MP(4K) 3840*2160 @30fps	Fixed Lens 2.8mm	H110° D126° V60°	Color: 0.012Lux @F1.6	120dB	25m	IP67 IK10	482,00	

AI Weather-proof Mini Bullet Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	STOCK MS-C5363-PE	5MP 2592x1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	50m	IP67 IK10	439,00	<ul style="list-style-type: none"> * Support PoE; SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Video Content Analysis, People Counting, Heat Map, Face Detection
	STOCK MS-C5363-PE/4	5MP 2592x1944 @30fps	Fixed Lens 4mm	H86° D108° V63°	Color: 0.008Lux @F1.6	120dB	50m	IP67 IK10	439,00	
	STOCK Nera MS-C5363-PE/4/N	5MP 2592x1944 @30fps	Fixed Lens 4mm	H86° D108° V63°	Color: 0.008Lux @F1.6	120dB	50m	IP67 IK10	491,00	

AI Motorized Dome Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C4575-FPD	4MP 2688x1520 @30fps	Motorized lens 2.7~13.5mm	H99°~H31° D124°~D38° V72°~V23°	Color: 0.005Lux @F1.4	120dB	50m	IP67 IK10	505,00	<ul style="list-style-type: none"> * Support PoE; Built-in Microphone; SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264; * Video Content Analysis
	STOCK MS-C5375-FPD	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H99°~H31° D124°~D38° V72°~V23°	Color: 0.008Lux @F1.4	120dB	50m	IP67 IK10	510,00	
	STOCK Nera MS-C5375-FPD/N	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H99°~H31° D124°~D38° V72°~V23°	Color: 0.008Lux @F1.4	120dB	50m	IP67 IK10	510,00	
	STOCK MS-C8175-FPD	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H107°~H33° D125°~D37° V58°~V18°	Color: 0.012Lux @F1.4	120dB	50m	IP67 IK10	605,00	




AI Motorized Bullet Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2964-RFPE	2MP 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H111°~H34° D130°~D39° V60°~V19°	Color: 0.005Lux @F1.4	140dB	50m	IP67 IK10	510,00	<ul style="list-style-type: none"> * Support PoE; SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Video Content Analysis, People Counting, Heat Map,Face Detection
	MS-C5364-FPE	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H99°~H31° D124°~D38° V72°~V23°	Color: 0.008Lux @F1.4	120dB	50m	IP67 IK10	548,00	
	MS-C8164-FPE	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H107°~H33° D125°~D37° V58°~V18°	Color: 0.012Lux @F1.4	120dB	50m	IP67 IK10	614,00	

AI Pro Series

AI Motorized Pro Dome Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2972-RFPE	2MP 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H115°~H34° D135°~D39° V62°~V19°	Color: 0.005Lux @F1.4	140dB	50m	IP67 IK10	628,00	<ul style="list-style-type: none"> * Support PoE; SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi port: Built-in Mic, Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, People Counting, Heat Map,Face Detection
	MS-C4472-RFPE	4MP 2688*1520 @60fps	Motorized lens 3.6~10mm	H96°~H42° D111°~D48° V55°~V23°	Color: 0.002Lux @F1.4	140dB	50m	IP67 IK10	841,00	
	MS-C5372-FPE	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H89°~H30° D111°~D37° V66°~V22°	Color: 0.008Lux @F1.4	120dB	50m	IP67 IK10	662,00	
	MS-C8172-FPE	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H96°~H33° D112°~D37° V53°~V18°	Color: 0.012Lux @F1.4	120dB	50m	IP67 IK10	713,00	
	MS-C8272-FPE	8MP(4K) 3840*2160 @30fps	Motorized lens 3.6~10mm	H110°~H46° D126°~D54° V61°~V25°	Color: 0.009Lux @F1.4	120dB	50m	IP67 IK10	874,00	

AI Motorized Pro Bullet Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2962-RFPE (1/2.8")	2MP 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H92°~H32° D107°~D37° V51°~V18°	Color: 0.005Lux @F1.4	140dB	60m	IP67	633,00	<ul style="list-style-type: none"> * Support PoE; SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi Port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, People Counting, Heat Map,Face Detection
	MS-C5362-FPE (1/2.8")	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H89°~H30° D111°~D37° V66°~V22°	Color: 0.008Lux @F1.4	120dB	60m	IP67	671,00	
	MS-C8162-FPE (1/2.8")	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H96°~H33° D112°~D37° V53°~V18°	Color: 0.012Lux @F1.4	120dB	60m	IP67	718,00	

AI Pro Box Plus Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2952-RPE (1/2.8")	2MP 1920*1080 @60fps	Optional	N/A	Color: 0.002Lux @F1.2	140dB	N/A	N/A	458,00	<ul style="list-style-type: none"> * Support PoE; SD card, up to 256G * Support H.265 + /H.265/H.264 + /H.264 * Multi Port: RS485, Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, People Counting, Heat Map,Face Detection
	MS-C4452-RPE (1/1.8")	4MP 2688*1520 @60fps	Optional	N/A	Color: 0.001Lux @F1.2	140dB	N/A	N/A	605,00	
	MS-C5352-PE (1/2.8")	5MP 2592*1944 @30fps	Optional	N/A	Color: 0.005Lux @F1.2	120dB	N/A	N/A	482,00	
	MS-C8152-PE (1/2.8")	8MP(4K) 3840*2160 @30fps	Optional	N/A	Color: 0.01Lux @F1.2	120dB	N/A	N/A	510,00	

AI Motorized Pro Bullet Plus Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
  	MS-C2966-RFPE	2MP 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H113°~H33° D130°~D38° V60°~V18°	Color: 0.005Lux @F1.4	140dB	65m	IP67 IK10	680,00	<ul style="list-style-type: none"> * Support PoE; SD card, up to 256G; 3-Axis Design; 4KV Surge Protection, * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi Port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, People Counting, Heat Map, Face Detection
	MS-C4466-RFPE	4MP 2688x1520 @60fps	Motorized lens 3.6~10mm	H100°~H45° D116°~D51° V57°~V25°	Color: 0.002Lux @F1.4	140dB	65m	IP67 IK10	893,00	
	STOCK MS-C5366-FPE	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H113°~H33° D138°~D42° V83°~V25°	Color: 0.008Lux @F1.4	120dB	65m	IP67 IK10	725,00	
	STOCK MS-C8166-FPE	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H110°~H33° D128°~D38° V60°~V18°	Color: 0.012Lux @F1.4	120dB	65m	IP67 IK10	765,00	
	MS-C8266-FPE	8MP(4K) 3840*2160 @30fps	Motorized lens 3.6~10mm	H116°~H48° D134°~D55° V65°~V27°	Color: 0.009Lux @F1.4	120dB	65m	IP67 IK10	936,00	

AI 4X/12X Pro Bullet Plus Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
 	MS-C2966-X12RPE	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	180m	IP67 IK10	775,00	<ul style="list-style-type: none"> * Support PoE; SD card, up to 256G; 3-Axis Design; 4KV Surge Protection, * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi Port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, People Counting, Heat Map, Face Detection
	MS-C4466-X4RPE	4MP 2688x1520 @60fps	4X AF Lens 8~32mm	H44°~H13° D51°~D15° V25°~V7°	Color: 0.002Lux @F1.6	140dB	180m	IP67 IK10	1.040,00	
	STOCK MS-C5366-X12PE	5MP 2592*1944 @30fps	12X AF Lens 5.3~64mm	H57°~H4° D69°~D5° V44°~V1°	Color: 0.008Lux @F1.6	120dB	180m	IP67 IK10	809,00	
	MS-C8266-X4PE	8MP(4K) 3840*2160 @30fps	4X AF Lens 8~32mm	H44°~H13° D51°~D15° V25°~V7°	Color: 0.009Lux @F1.6	120dB	180m	IP67 IK10	1.172,00	

AI Panoramic Series

AI 180° Panoramic Mini Dome Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
 	MS-C5376-PE	5MP 2592x1944 @30fps	Fixed Lens 1.68mm	H180° V95°	Color: 0.008Lux @F2.0	120dB	15m	IP67 IK10	581,00	<ul style="list-style-type: none"> * Support PoE; Built-in Microphone; SD card, up to 256G * Support H.265 + /H.265/H.264 + /H.264 * Integrated Junction Box * Video Content Analysis, People Counting, Heat Map
	STOCK MS-C8176-PE	8MP(4K) 3840*2160 @25fps	Fixed Lens 1.68mm	H180° V86°	Color: 0.012Lux @F2.0	120dB	15m	IP67 IK10	619,00	

AI 180° Panoramic Mini Bullet Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
 	MS-C5365-PE	5MP 2592x1944 @30fps	Fixed Lens 1.68mm	H180° V95°	Color: 0.008Lux @F2.0	120dB	15m	IP67 IK10	595,00	<ul style="list-style-type: none"> * Support PoE; Built-in Microphone; SD card, up to 256G * Support H.265 + /H.265/H.264 + /H.264 * Integrated Junction Box * Video Content Analysis, People Counting, Heat Map
	STOCK MS-C8165-PE	8MP(4K) 3840*2160 @25fps	Fixed Lens 1.68mm	H180° V86°	Color: 0.012Lux @F2.0	120dB	15m	IP67 IK10	633,00	

AI 360° Panoramic Fisheye Network Camera

Immagine	Modello	Imaging Device	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	STOCK MS-C8274-PA	1/1.8" 4K CMOS	Fixed Lens 1.5mm	Ceiling: 360° Wall: 180° Flat: 360°	Color: 0.008Lux @F1.8	120dB	15m	IP67 IK10	893,00	<ul style="list-style-type: none"> * Support PoE; Built-in Microphone; SD card, up to 256G * Support H.265 + /H.265/H.264 + /H.264 * Support Built-in Mic * Video Content Analysis, People Counting, Heat Map
	STOCK MS-C9674-PA	1/1.7" 12MP CMOS	Fixed Lens 1.98mm	Ceiling: 360° Wall: 180° Flat: 360°	Color: 0.05Lux @F2.8	120dB	15m	IP67 IK10	1.356,00	<ul style="list-style-type: none"> * Support PoE; Built-in Microphone; SD card, up to 256G * Support H.265 + /H.265/H.264 + /H.264 * Multi Port: Built-in Mic, Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, People Counting, Heat Map

AI Dual-sensor 180° Panoramic Network Camera


Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	STOCK MS-C8477-PC	8MP 5084x1520 @25fps	Fixed Lens 4mm	H180° V50°	Color: 0.002Lux @F1.6	140dB	30m	IP67 IK10	959,00	<ul style="list-style-type: none"> * Support PoE; Built-in Microphone; SD card, up to 1TB * Support H.265 + /H.265(HEVC)/H.264 + /H.264/MJPEG * Intrusion Detection, Motion Detection, Heat Map

AI PTZ Series


AI 12X PTZ Bullet Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2961-X12RPE	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	140m	IP66	973,00	<ul style="list-style-type: none"> * Support PoE; SD card, up to 256G; IR LEDs & White LEDs; * Support H.265 + /H.265/H.264 + /H.264; * 12X Optical Zoom, PTZ Position Display, 3D positioning, * 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360° Pan Range; Pan Manual Speed: 0.1°~50°/s, Preset Speed: 50°/s * -45°~30° / Tilt Manual Speed: 0.1°~25°/s, Tilt Preset Speed: 25°/s * DC + PoE + Alarm (Default), DC + PoE + Audio (Optional) * Wall Mount Bracket (Default), Pedestal Mount Bracket (Optional) * AI Based Video Content Analysis, People Counting, Face Detection <p>ATTENZIONE: BOX di giunzione MS-A62 NON compreso</p>
	STOCK MS-C5361-X12PE e.o.l.	5MP 2592*1944 @30fps	12X AF Lens 5.3~64mm	H57°~H4° D69°~D5° V44°~V1°	Color: 0.008Lux @F1.6	120dB	140m	IP66	1.021,00	

AI 12X/20X/23X PTZ Bullet Plus Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2967-X12RPE	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.5	140dB	180m	IP66	1.219,00	<ul style="list-style-type: none"> * Support PoE; SD card, up to 256G; * Support H.265 + /H.265/H.264 + /H.264; * New-generation PTZ Motor; * 12X/20X/23X Optical Zoom; PTZ Position Display, 3D positioning, * 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360° Pan Range; Pan Manual Speed: 0.1°~60°/s, Preset Speed: 60°/s * -45°~30° / Tilt Manual Speed: 0.1°~30°/s, Tilt Preset Speed: 30°/s * Multi port: Alarm I/O, Audio I/O, DC 12V * AI Based Video Content Analysis, People Counting, Face Detection, Vehicle Counting <p>ATTENZIONE: BOX di giunzione MS-A62 NON compreso</p>
	MS-C2967-X23RPE	2MP 1920*1080 @60fps	23X AF Lens 6.4~128mm	H60°~H3° D69°~D4° V35°~V2°	Color: 0.005Lux @F1.5	140dB	180m	IP66	1.271,00	
	MS-C4467-X20RPE	4MP 2688x1520 @60fps	20X AF Lens 6.4~128mm	H60°~H3° D67°~D4° V37°~V1°	Color: 0.002Lux @F1.6	140dB	180m	IP66	1.739,00	
	STOCK MS-C5367-X12PE	5MP 2592*1944 @30fps	12X AF Lens 5.3~64mm	H57°~H4° D69°~D5° V44°~V1°	Color: 0.008Lux @F1.6	120dB	180m	IP66	1.266,00	
	MS-C5367-X23PE	5MP 2592*1944 @30fps	23X AF Lens 5~117mm	H55°~H3° D68°~D4° V42°~V2°	Color: 0.008Lux @F1.5	120dB	180m	IP66	1.314,00	
	MS-C8267-X20PE	8MP(4K) 3840*2160 @30fps	20X AF Lens 6.4~128mm	H60°~H3° D67°~D4° V37°~V1°	Color: 0.009Lux @F1.6	120dB	180m	IP66	2.126,00	


AI 12X/20X/23X PTZ Dome Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2971-X12RPE (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	160m	IP66 IK10	1.243,00	<ul style="list-style-type: none"> * Support PoE; SD card, up to 256G, 4KV Surge Protection * Support H.265 + /H.265/H.264 + /H.264 * 12X/20X/23X optical zoom, PTZ Position Display, 3D positioning, * 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360° endless Pan, Pan Manual Speed: 0.1°~450°/s, Preset Speed: 450°/s * -5°~90° Tilt, Tilt Manual Speed: 0.1°~360°/s, Preset Speed: 360°/s * Multi Port: Alarm I/O, Audio I/O, DC 12V * AI Based Video Content Analysis, People Counting, Face Detection
	MS-C2971-X23RPE (1/2.8")	2MP 1920*1080 @60fps	23X AF Lens 5~117mm	H60°~H3° D69°~D4° V35°~V2°	Color: 0.005Lux @F1.5	140dB	160m	IP66 IK10	1.314,00	
	MS-C2871-X20TPE (1/2")	2MP 1920*1080 @90fps	20X AF Lens 6.4~128mm	H60°~H3° D67°~D4° V37°~V1°	Color: 0.002Lux @F1.6	140dB	160m	IP66 IK10	1.956,00	
	MS-C4471-X20RPE (1/2.8")	4MP 2688x1520 @60fps	20X AF Lens 6.4~128mm	H60°~H3° D67°~D4° V37°~V1°	Color: 0.002Lux @F1.6	140dB	160m	IP66 IK10	1.956,00	
	MS-C5371-X12PE (1/2.8")	5MP 2592*1944 @30fps	12X AF Lens 5.3~64mm	H57°~H4° D69°~D5° V44°~V1°	Color: 0.008Lux @F1.6	120dB	160m	IP66 IK10	1.290,00	

AI 25X/30X/36X/42X Speed Dome Network Camera

Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	MS-C2941-X25RPE	2MP 1920*1080 @60fps	25X AF Lens 4.8~120mm	H61.8°~H2.8° D70.8°~D3.8° V36.8°~V1.8°	Color: 0.005Lux @F1.5	140dB	200m	IP66	1.521,00	<ul style="list-style-type: none"> * Support PoE; SD card, up to 256G, 6KV Surge Protection, Heater * Support H.265 + /H.265/H.264 + /H.264 * 25X/30X/36X/42X Optical Zoom; PTZ Position Display, 3D positioning, 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360°endless / Pan Manual Speed: 0.1°~250°/s, Pan Preset Speed: 250°/s * -5°~90°(Auto Flip) / Tilt Manual Speed: 0.1°~160°/s, Tilt Preset Speed: 160°/s * Multi port: RS485, Alarm I/O*4/2, Audio I/O, AC 24V * Video Content Analysis, People Counting, Face Detection, Vehicle Counting * Wall Mount Bracket A41 (Default) Optional: * High Frame Rate: € 95(-T Series: 2MP@90fps) * IK10: € 142,00
	MS-C2941-X30RPE	2MP 1920*1080 @60fps	30X AF Lens 4.7~141mm	H62°~H3° D70°~D3° V37°~V1°	Color: 0.005Lux @F1.5	140dB	200m	IP66	1.970,00	
	MS-C2941-X42RPE	2MP 1920*1080 @60fps	42X AF Lens 7~300mm	H45°~H2° D50°~D2° V27°~V1°	Color: 0.005Lux @F1.8	140dB	300m	IP66	4.097,00	
	MS-C4441-X36RPE	4MP 2688*1520 @60fps	36X AF Lens 5~205.3mm	H62°~H3° D70°~D3° V37°~V1°	Color: 0.008Lux @F1.55	120dB	300m	IP66	3.048,00	
	STOCK MS-C5341-X25PE	5MP 2592*1944 @30fps	25X AF Lens 4.8~120mm	H57°~H2.8° D69.8°~D3.6° V43.8°~V1.8°	Color: 0.008Lux @F1.5	120dB	200m	IP66	1.555,00	
	STOCK MS-C5341-X30PE	5MP 2592*1944 @30fps	30X AF Lens 4.7~141mm	H58°~H3° D71°~D3° V44°~V2°	Color: 0.008Lux @F1.5	120dB	200m	IP66	2.055,00	
	STOCK MS-C5341-X42PE	5MP 2592*1944 @30fps	42X AF Lens 7~300mm	H43°~H2° D53°~D2° V33°~V1°	Color: 0.008Lux @F1.8	120dB	300m	IP66	4.361,00	
MS-C8241-X36PE	8MP(4K) 3840*2160 @30fps	36X AF Lens 5.7~205.2mm	H66°~H3° D72°~D3° V41°~V1°	Color: 0.009Lux @F1.55	120dB	300m	IP66	3.270,00		




AI 30X/36X/42X Wiper Speed Dome Network Camera





Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2941-X30RPE /W (1/2.8")	2MP 1920*1080 @60fps	30X AF Lens 4.7~141mm	H62°~H3° D70°~D3° V37°~V1°	Color: 0.005Lux @F1.5	120dB	300m	IP66	2.054,00	<ul style="list-style-type: none"> * Smart Rain-sensing Wiper * Support PoE; SD card, up to 256G, 6KV Surge Protection, Heater * Support H.265 + /H.265/H.264 + /H.264 * 30X/36X/42X Optical Zoom; PTZ Position Display, 3D positioning, 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360°endless / Pan Manual Speed: 0.1°~250°/s, Pan Preset Speed: 250°/s * -5°~90°(Auto Flip) / Tilt Manual Speed: 0.1°~160°/s, Tilt Preset Speed: 160°/s * Multi port: RS485, Alarm I/O *4/2, Audio I/O, AC 24V * Video Content Analysis, People Counting, Face Detection, Vehicle Counting * Wall Mount Bracket A41 (Default)
	MS-C2941-X42RPE /W (1/2.8")	2MP 1920*1080 @60fps	42X AF Lens 7~300mm	H45°~H2° D50°~D2° V27°~V1°	Color: 0.005Lux @F1.8	120dB	300m	IP66	4.361,00	
	MS-C4441-X36RPE /W (1/1.8")	4MP 2688*1520 @60fps	36X AF Lens 5~205.3mm	H62°~H3° D70°~D3° V37°~V1°	Color: 0.008Lux @F1.55	120dB	300m	IP66	3.312,00	
	MS-C5341-X30PE /W (1/2.8")	5MP 2592*1944 @30fps	30X AF Lens 4.7~141mm	H58°~H3° D71°~D3° V44°~V2°	Color: 0.008Lux @F1.5	120dB	300m	IP66	2.589,00	
	MS-C5341-X42PE /W (1/2.8")	5MP 2592*1944 @30fps	42X AF Lens 7~300mm	H43°~H2° D53°~D2° V33°~V1°	Color: 0.008Lux @F1.8	120dB	300m	IP66	4.631,00	
	MS-C8241-X36PE /W (1/1.8")	8MP(4K) 3840*2160 @30fps	36X AF Lens 5.7~205.2mm	H66°~H3° D72°~D3° V41°~V1°	Color: 0.009Lux @F1.55	120dB	300m	IP66	3.530,00	

5G AIoT Series






AIoT 12X Pro Bullet Plus Network Camera





Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche
	MS-C2966-X12ROPC -915M (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	180m	IP67	988,00	<ul style="list-style-type: none"> * Built-in LoRaWAN® Gateway * Support Connection with more than 2000 LoRaWAN® Sensors / Nodes from 8 End-Devices Simultaneously * High Capacity, High Compatibility, Embedded Network Server * Support IoT, PoE, SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, People Counting, Face Detection, Heat Map * IP67 Only for Camera Body





5G AI Motorized Pro Bullet Plus Network Camera											
Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche	
	MS-C2966-RFGPC	2MP 1920*1080 @60fps	Motorized Lens 2.7~13.5mm	H113°~H33° D130°~D38° V60°~V18°	Color: 0.005Lux @F1.4	140dB	65m	IP67	1.852,00	<ul style="list-style-type: none"> * Supprt 5G/4G/3G,P2P, Nano SIM * Support PoE, SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, People Counting, Face Detection, Heat Map * IP67 Only for Camera Body 	
	STOCK MS-C5366-FGPC	5MP 2592x1944 @30fps	Motorized Lens 2.7~13.5mm	H113°~H33° D138°~D42° V83°~V25°	Color: 0.008Lux @F1.4	120dB	65m	IP67	1.923,00		
	MS-C8266-FGPC	8MP(4K) 3840*2160 @30fps	Motorized Lens 3.6~10mm	H116°~H48° D134°~D55° V65°~V27°	Color: 0.009Lux @F1.4	120dB	65m	IP67	2.065,00		
5G AI 4X/12X Pro Bullet Plus Network Camera											
Immagine	Modello	Risoluzione	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche	
	MS-C2966-X12RGPC	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	180m	IP67	1.999,00	<ul style="list-style-type: none"> * Supprt 5G/4G/3G,P2P, Nano SIM * Support PoE, SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, People Counting, Face Detection, Heat Map * IP67 Only for Camera Body 	
	MS-C8266-X4GPC	8MP(4K) 3840*2160 @30fps	4X AF Lens 8~32mm	H44°~H13° D51°~D15° V25°~V7°	Color: 0.009Lux @F1.6	120dB	180m	IP67	2.211,00		
5G AIoT 4X/12X Pro Bullet Plus Network Camera											
Immagine	Modello	Resolution	Ottica	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Caratteristiche	
	STOCK MS-C2966-X12RGOPC	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	180m	IP67	2.263,00	<ul style="list-style-type: none"> * Built-in LoRaWAN® Gateway * Support Connection with more than 2000 LoRaWAN® Sensors / Nodes from 8 End-Devices Simultaneously * High Capacity, High Compatibility, Embedded Network Server * Support IoT, 5G/4G/3G, P2P, Nano SIM * Support PoE, SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, People Counting, Face Detection, Heat Map * IP67 Only for Camera Body 	
	MS-C8266-X4GOPC	8MP(4K) 3840*2160 @30fps	4X AF Lens 8~32mm	H44°~H13° D51°~D15° V25°~V7°	Color: 0.009Lux @F1.6	120dB	180m	IP67	2.476,00		

TELECAMERE LETTURA TARGHE											
Immagine	Modello	Ottica	Field of View	Ultra Low-light	WDR	ANPR Distance (Day)	ANPR Distance (Night with Illumination)	IR Distance	Listino €	Caratteristiche	
	STOCK MS-C2964-RFLPE	Motorized lens 2.7~13.5mm 2MP 1920*1080 @60fps	H111°~H34° D130°~D39° V60°~V19°	Color: 0.005Lux @F1.4	140dB	25m	20m	Up to 50m	1.389,00 €	<ul style="list-style-type: none"> * Support SD card, up to 256G; 3-Axis Design * Multi Port: Alarm I/O*1+Audio I/O*1+DC 12V+PoE * IP&IK Rating: IP67 - IK10 	
	MIL-MS-A63	STAFFA DA PARETE BULLET MINI							47,00 €		
	STOCK TS2966-X12TPE	12X AF Lens 5.3~64mm 1920*1080 @90fps	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	70m	35m	Up to 180m	1.975,00 €	<ul style="list-style-type: none"> * Support SD card, up to 256G; 3-Axis Design * Multi-Port: RS485+Alarm I/O*1+Audio I/O*1+DC 12V +PoE * Integrated Cable Management (Default) * IP&IK Rating: IP67 - IK10 	
	STOCK MS-C2866-X4TLPA	4X AF Lens 8~32mm 1920*1080 @90fps	H44°~H13° D51°~D15° V25°~V7°	Color: 0.002Lux@F1.6 6 B/W: 0Lux with IR on	120Db	60m	30m	Up to 180m	1.914,00 €		


PoE NVR Series



4K H.265 + Mini PoE NVR 1000 Series										
Immagine	Modello	Bandwidth	Synchronous playback	PoE Ports	HDD Support	Local display		Alarm I/O	Listino €	Caratteristiche
						HDMI	VGA			
	STOCK  MS-N1004-UPC	In:40Mbps Out:40Mbps	1*8MP 1*5MP 4*1080P 4*720P	4	1*10TB	✓	N/A	N/A	383,00	1*RJ45 10/100Mbps 2*USB2.0 Interfaces 220mm(W)*200mm(D)*43.6mm(H) AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup
	STOCK  MS-N1008-UPC	In:80Mbps Out:80Mbps	1*8MP 1*5MP 4*1080P 8*720P	4	1*10TB	✓	N/A	N/A	416,00	Optional: Gold/Silver Color
	 MS-N1008-UNPC	In:80Mbps Out:80Mbps	1*8MP 1*5MP 4*1080P 8*720P	4	1*10TB	✓	N/A	N/A	510,00	1*RJ45 100/1000Mbps 2*USB2.0 Interfaces 115mm(W)*115mm(D)*180mm(H) AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup Optional: Black/Silver Color

4K H.265 + PoE NVR 5000 Series (NDAA)										
Immagine	Modello	Bandwidth	Synchronous playback	PoE Ports	HDD Support	Local display		Alarm I/O	Listino €	Caratteristiche
						HDMI	VGA			
	STOCK  MS-N5008-PE	In:80Mbps Out:50Mbps	1*8MP 2*5MP 6*1080P 8*720P	8	2*10TB	✓	✓	4/1	695,00	1*RJ45 100/1000Mbps 2*USB 2.0 Interfaces 1*RCA Audio Input + 1*RCA Audio Output AI Based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup
	STOCK  MS-N5016-NPE	In:160Mbps Out:160Mbps	3*8MP 4*5MP 12*1080P 16*720P	16	2*10TB	✓	✓	4/1	988,00	1*RJ45 100/1000Mbps 2*USB 2.0 Interfaces 1*RCA Audio Output AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup


4K H.265 + PoE NVR 7000 Series										
Immagine	Modello	Bandwidth	Synchronous playback	PoE Ports	HDD Support	Local display		Alarm I/O	Listino €	Caratteristiche
						HDMI	VGA			
	STOCK  MS-N7016-PG	In:160Mbps Out:160Mbps	6*8MP 8*6MP 12*4MP 16*1080P	16	4*20TB (3.5"HDD)	✓	✓	16/4	1.611,00	1*RJ45 100/1000Mbps 1*RCA Audio Input + 1*RCA Audio Output 1*RS-485 Series Port for PTZ 1*RS-232 Series Port for Console 1*RS-485 Series Port for Keyboard 1*USB 3.0 Interfaces + 2*USB 2.0 Interfaces * N+1 Hot Spare RAID 0/1/5/6/10 Storage AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup
	 MS-N7032-UPH	In:256Mbps Out:256Mbps	4*8MP 6*5MP 16*1080P 32*720P	24	4*10TB	✓	✓	16/4	1.805,00	
	 MS-N7048-UPH	In:320Mbps Out:256Mbps	4*8MP 6*5MP 16*1080P 32*720P	24	4*10TB	✓	✓	16/4	1.966,00	

NVR Series


4K H.265 + Mini NVR 1000 Series										
Immagine	Modello	Bandwidth	Synchronous playback	RAID	HDD Support	Local display		Audio Alarm	Listino €	Caratteristiche
						HDMI	VGA			
	STOCK MS-N1004-UC	In:40Mbps Out:40Mbps	1*8MP 1*5MP 4*1080P 4*720P	N/A	1*10TB (3.5"HDD)	✓	N/A	N/A	274,00	1*RJ45 10/100Mbps 2*USB 2.0 Interfaces 1*SATA HDD(3.5") support 220mm(W)*220mm(D)*43.6mm(H) AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup
	STOCK MS-N1008-UC	In:80Mbps Out:80Mbps	1*8MP 1*5MP 4*1080P 8*720P	N/A	1*10TB (3.5"HDD)	✓	N/A	N/A	302,00	Optional: Gold/Silver Color
	STOCK MS-N1008-UNC	In:80Mbps Out:80Mbps	1*8MP 1*5MP 4*1080P 8*720P	N/A	2*2TB (2.5"HDD)	✓	N/A	N/A	359,00	1*RJ45 100/1000Mbps 2*USB 2.0 Interfaces 80mm(W)*80mm(D)*120mm(H) AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup Optional: Black/Gold/Silver Color 2*2.5"HDD Support: (HDD Listino € is floating, pls enquire separately.) (HDD need to be pre-installed before delivery)

4K H.265 + Pro NVR 5000 Series (NDAA)										
Immagine	Modello	Bandwidth	Synchronous playback	RAID	HDD Support	Local display		Alarm I/O	Listino €	Caratteristiche
						HDMI	VGA			
	STOCK MS-N5008-E	In:80Mbps Out:50Mbps	1*8MP 2*5M 6*1080P 8*720P	N/A	2*10TB	✓	✓	4/1	543,00	1*RJ45 100/1000Mbps 2*USB 2.0 Interfaces 1*RCA Audio Input + 1*RCA Audio Output AI Based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup
	STOCK MS-N5016-E	In:80Mbps Out:50Mbps	1*8MP 2*5MP 6*1080P 12*720P	N/A	2*10TB	✓	✓	4/1	491,00	1*RJ45 100/1000Mbps 2*USB 2.0 Interfaces 1*RCA Audio Output AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup Phasing out by Q4
	STOCK MS-N5016-NE	In:160Mbps Out:160Mbps	3*8MP 4*5MP 12*1080P 16*720P	N/A	2*10TB	✓	✓	4/1	569,00	1*RJ45 100/1000Mbps 2*USB 2.0 Interfaces 1*RCA Audio Output AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup

4K H.265 + Pro NVR 7000 Series


Immagine	Modello	Bandwidth	Synchronous playback	RAID	HDD Support	Local display		Alarm I/O	Listino €	Caratteristiche
						HDMI	VGA			
	STOCK MS-N7016-G	In:160Mbps Out:160Mbps	6*8MP 9*5MP 16*1080P 16*720P	0/1/5/6/10	4*10TB	✓	✓	16/4	1.271,00	2*RJ45 100/1000Mbps 1*RCA Audio Input + 1*RCA Audio Output 1*RS-485 Series Port for PTZ 1*RS-232 Series Port for Console 1*RS-485 Series Port for Keyboard 1*USB 3.0 Interfaces + 2*USB 2.0 Interfaces AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, N+1 Hot Space, Auto Backup
	STOCK MS-N7032-G	In:256Mbps Out:256Mbps	6*8MP 9*5MP 24*1080P 32*720P	0/1/5/6/10	4*10TB	✓	✓	16/4	1.499,00	

4K H.265 + Pro NVR 8000 Series

Immagine	Modello	Bandwidth	Synchronous playback	RAID	HDD Support	Local display		Alarm I/O	Listino €	Caratteristiche
						HDMI	VGA			
	STOCK MS-N8032-G	In:256Mbps Out:256Mbps	6*8MP 9*5MP 24*1080P 32*720P	0/1/5/6/10	8*10TB	2*HDMI	2*VGA	16/4	1.701,00	2*RJ45 100/1000Mbps 1*RCA Audio Input + 2*RCA Audio Output 1*eSATA Interface 1*RS-485 Series Port for PTZ 1*RS-232 Series Port for Console 1*RS-485 Series Port for Keyboard 1*USB 3.0 Interfaces + 2*USB 2.0 Interfaces AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, N+1 Hot Space, Auto Backup
	STOCK MS-N8064-G	In:320Mbps Out:256Mbps	6*8MP 9*5MP 24*1080P 48*720P	0/1/5/6/10	8*10TB	2*HDMI	2*VGA	16/4	2.290,00	







Keyboard Series

Network Keyboard













Immagine	Modello	LCD Screen	Joystick	Control Mode	PTZ Control	NVR Control	RS232	RJ45	Listino €	Caratteristiche
	MS-K01	58x44 (2.8") Blue Screen	4-axis joystick	IP-based	✓	✓	✓	✓	1.5070,00	Support Milesight NVR + PTZ Camera Support PoE & DC12V, Built-in Web Server Up to 110 Devices Control 1 * RJ45 100/1000Mbps 1 * RS232







PoE Switch Series

PoE Switch

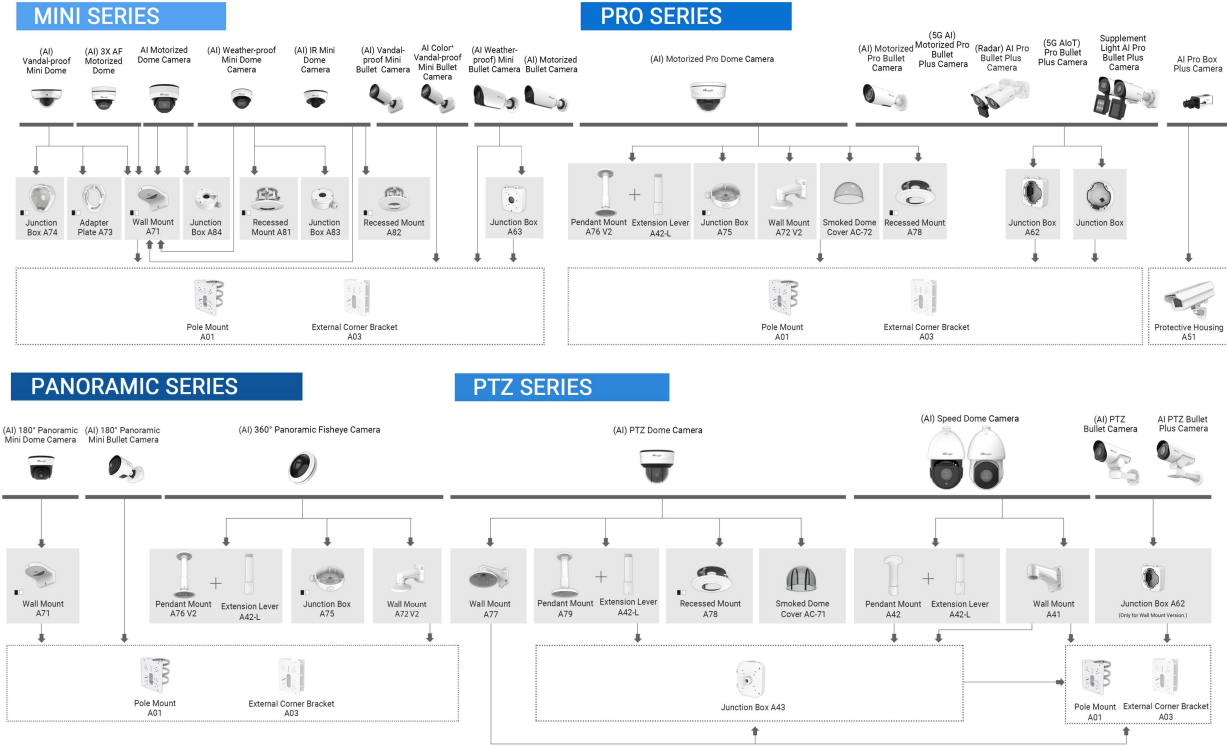
Immagine	Modello	Ports			Max. PoE Power		Switching Capacity	Extend Mode	Listino €	Caratteristiche
		PoE Ports	Uplink Ports	SFP Ports	Max Capacity	Single Port				
	MS-S0204-EL	4X10/100 Mbps	2X100 Mbps	N/A	60W	30W	1.6 Gbps	✓	109,00	* PoE Standard: IEEE802.3 af/at * Port Lightning Protection: 4KV 8/20us * Protection Level: IP30
	MS-S0208-GL	8X10/100 Mbps	2X1000 Mbps	N/A	120W	30W	11.8 Gbps	✓	189,00	
	MS-S0216-GL	16X10/100 Mbps	2X1000 Mbps	N/A	200W	30W	14.8 Gbps	✓	491,00	
	MS-S0224-GL	24X10/100 Mbps	2X1000 Mbps	N/A	400W	30W	14.8 Gbps	✓	695,00	
	MS-S0416-GF	16X10/100 Mbps	2X1000 Mbps	2X1000 Mbps	250W	30W	14.8 Gbps	N/A	638,00	
	MS-S0424-GF	24X10/100 Mbps	2X1000 Mbps	2X1000 Mbps	400W	30W	14.8 Gbps	N/A	789,00	
STOCK										

Accessories			
Image	Modello	Description	Listino €
	Screw Driver Kit	1 * T10 Plum screwdriver 1 * H2.0 Hexagon screwdriver 1 * T20 Plum screwdriver 1* L-shaped hexagon wrench	9,00
	A01	Pole Mount with Stainless Steel Straps * Net Weight:720g * Dimension: 170*51.5*152.6mm * Installation Environment: For strapping cameras on poles between 102-127 (4.1-5 inches) in diameter * Applicable Modello:(AI Weather- Proof)Mini Bullet, AI Vandal-proof Mini Bullet, AI Motorized Bullet,AI PTZ Bullet Plus, AI Color + Vandal-proof Mini Bullet,(AI) 180° Panoramic Mini Bullet&Dome, A41, A43, A62, A63, A71, A72, A77	47,00
	A03	External Corner Bracket * Net Weight: 900g * Dimension: 170*152.5*76mm * Installation Environment: For mounting cameras on an external corner * Applicable Model: (AI Weather- Proof)Mini Bullet, AI Vandal-proof Mini Bullet, AI Motorized Bullet, AI 180° Panoramic Mini Bullet&Dome, A41, A62, A63, A71, A72, A77,A43	47,00
	A41	Wall Mount * Net Weight: 400g * Dimension: 200*129*100mm * Installation Environment: For wall or parapet installation * Applicable Model: Speed Dome	71,00
	A42	Pendant Mount * Net Weight: 650g * Dimension: Ø116.5*255mm * Installation Environment: For ceiling or horizontal structure * Applicable Model: Speed Dome	71,00
	A42-L	Extention Lever * Net Weight: 325g * Dimension: Ø57*255mm * Installation Environment: Used as extentions for Pendant Mount * Applicable Model: A42, A79,A76 V2	71,00
	A43	Junction Box * Net Weight: 1000g * Dimension: 195*164*80mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: A01, A41, A42,A03	95,00
	A51	Protective Housing with the Wall Mount Bracket * Net Weight: 1988g * Dimension: 380*150*H mm (H is adjustable) * Installation Environment: Robust housing to defend cameras from being damaged in all challenging environments * Applicable Model: AI Pro Box Plus	165,00
	A62	Junction Box * Net Weight: 510g * Dimension: 134*126*40mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and preventing from being tampered * Applicable Model: AIPro Bullet, (Radar) AI Pro Bullet Plus, (5G AIoT) Pro Bullet Plus, AI PTZ Bullet Plus, AI PTZ Bullet(Only for Wall Mount Version), Supplement Light AI Pro Bullet Plus * Color optional: White (Default) / Black (Optional: \$5,MOQ: 10Pcs)	47,00
	A63	Junction Box * Net Weight: 620g * Dimension: 134*126*40mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: (AI Weather-proof)Mini Bullet, AI Motorized Mini Bullet * Color optional: White (Default) / Black (Optional: \$5,MOQ: 10Pcs)	47,00
	A64	Adapting Plate * Net Weight: 55g * Dimension: 134*127*40mm * Applicable Model: Panoramic Mini Bullet, Vandal-proof Mini Bullet (Only for junction box version)	9,00
	A71	Wall Mount Bracket * Net Weight: 530g * Dimension: 162*124*78mm * Installation Environment: Used to install camera on a wall or vertical structure * Applicable Model: AI IR Mini Dome,AI Vandal-proof Mini Dome, AI Weather-proof Mini Dome, AI 3X AF Motorized Dome, AI Motorized Dome,AI 180° Panoramic mini dome * Color optional: White (Default) / Black (Optional: \$5,MOQ: 10Pcs)	47,00
	A72 (V2)	Wall Mount Bracket * Net Weight: 560g * Dimension: 240*160*136mm * Installation Environment: For wall or parapet installations * Applicable Model: AI Pro Dome, Fisheye, AI Motorized Dome, AI 180° Mini Panoramic Dome	71,00
	AC-71	Smoked Dome Cover * Net Weight: 120g * Dimension: Ø136.8*92.5mm * Installation Environment: For concealing where a camera is pointed. * Applicable Model: AI PTZ Dome	47,00
	AC-72	Smoked Dome Cover * Net Weight: 39g * Dimension: Ø100*56mm (4 inch) * Installation Environment: For concealing where a camera is pointed. * Applicable Model:AI Pro Dome	24,00
	A73	Adapter Plate * Net Weight: 28g * Dimension: 115*122.5*10mm * Installation Environment: For the installation that cable need to be routed through the side outlet * Applicable Model: AI Vandal-proof Mini Dome * Color optional: White (Default) / Black (Optional: \$5,MOQ: 10Pcs)	9,00

Accessories				
Image	Modello	Description	Listino €	
	A74	Junction Box * Net Weight: 60g * Dimension: 121.5*116.5*37.2mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: AI Vandal-proof Mini Dome * Color optional: White (Default) / Black (Optional: \$5,MOQ: 10Pcs)	24,00	
	A75	Junction Box * Net Weight: 200g * Dimension: 145*167*33.5mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: AI Pro Dome, AI 360° Panoramic Fisheye * Color optional: White (Default) / Black (Optional: \$5,MOQ: 10Pcs)	47,00	
	A76	Pendant Mount * Net Weight: 620g * Dimension: Ø136*L (L is default as 300mm,also can be extended with A76-L) * Installation Environment: Used to install cameras on a ceiling or horizontal structure. * Applicable Model: AI Pro Dome, AI 360° Panoramic Fisheye,AI 3X AF Motorized Dome, AI Motorized Dome, AI 180° Panoramic mini dome	85,00	
	A76-L	Extension Lever * Net Weight: 315g * Dimension: Ø34*300mm * Installation Environment: Used as extensions for pendant mount. * Applicable Model: A76	38,00	
	A77	Wall Mount * Net Weight: 650g * Dimension: 262*185*138mm * Installation Environment: For wall or parapet installation * Applicable Model: PTZ Dome	85,00	
	A78	Recessed Mount * Net Weight: 715g * Dimension: Ø256*94mm * Installation Environment: For in- ceiling installation * Applicable Model: AI PTZ Dome, AI Pro Dome * Color optional: White (Default) / Black (Optional: \$5,MOQ: 10Pcs)	95,00	
	A79	Pendant Mount * Net Weight: 850g * Dimension: Ø256*295mm * Installation Environment: For ceiling or horizontal structure * Applicable Model: AI PTZ Dome	85,00	
	A81	Recessed Mount * Net Weight: 450g * Dimension: Ø168.7*91.3mm * Installation Environment: For in- ceiling installation * Applicable Model: AI Weather-proof Mini Dome (Only for cable out version)	85,00	
	A82	Recessed Mount * Net Weight: 475g * Dimension: Ø168.7*91.3mm * Installation Environment: For in- ceiling installation * Applicable Model: AI IR Mini Dome	85,00	
	A83	Junction Box * Net Weight: 270g * Dimension: Ø122*45.5mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering * Applicable Model: AI Weather-proof Mini Dome	38,00	
	A84	Junction Box * Net Weight: 361.55g * Dimension: 145.5*167*47.6mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: AI Motorized Dome	47,00	
	S45	Solar Panel Modules * Net Weight: 4.2kg *External Dimension: 580*385*69mm * Installation Environment: For expanding solar energy receiving area to improve conversion efficiency * Applicable Model: 4G Solar-powered Traffic Sensing Camera	284,00	

Power Supply					
Image	Description	Applicable Model	Voltage	Dimension	Listino €
	Power Adaptor	For all cameras Except PTZ Series	DC 12V, 1.5A	1.5m, 80*34.5*42.5mm	\$6
	Power Adaptor	Only for PTZ Bullet Cameras	DC 12V, 2A	1.5m, 107*43.5*31mm	\$6
	Power Adaptor	Only for Speed Dome Cameras	AC 24V, 3A	1.4m, 130*92*68mm	\$20
	PoE Injector	For all cameras Except Lite Series & PTZ Series	DC 48V, 0.42A	1.5m, 113*55*28mm	\$10
	Power Adaptor	Only for Supplement Light LPR 4X Pro Bullet Plus Network Camera	DC 12V,3A	1.2m, 116.1*52.4*30.8mm	\$15
	Power Adaptor	Only for 4G Solar-powered Traffic Sensing Camera	DC 5V/2A	60.4*37.8*27mm	\$6

Accessory Map



Naming Convention

Network Camera

(Model): **MS-C2966-R(T)F(I)PC --- AI Motorized Pro Bullet Plus Camera**

MS-C	2	9	66	-	R F I P C
Milesight Camera	Risoluzione	Sensor	Camera Type		Advanced Features
2 - 2MP	2 - 2MP	1 - 4K	41 - Speed Dome camera		T - High Frame Rate (90fps)
4 - 4MP	4 - 4MP	2 - 4K (1/1.8")	52 - Pro Box Plus Camera		R - High Frame Rate (60fps)
5 - 5MP	5 - 5MP	3 - 5MP	67 - PTZ Bullet Plus Camera		S - 20fps@ 4K Series
8 - 4K	4 - 4MP (1/1.8")	4 - 4MP (1/1.8")	66 - Pro Bullet Plus Camera		X - Magnification of the lens e.g.: X42 - 42X AF lens
9 - 12MP	6 - 12MP	8 - 2MP (1/2")	65 - 180° Panoramic Mini Bullet Camera		F - Motorized Vari-focal Lens
	8 - 2MP (1/2")	9 - 2MP	64 - Vandal-proof Mini Bullet Camera		I - P-Iris Supported
			63 - Weather-proof Mini Bullet Camera		U - Full Color Supported
			62 - Pro Bullet camera		G - 5G Supported
			61 - PTZ Bullet Camera		O - IoT Supported
			76 - 180° Panoramic Mini Dome Camera		P - PoE Supported
			75 - Weather-proof Mini Dome Camera		A/C/D/E - AI Platform
			74 - AI 360° Panoramic FisheyeCamera		
			73 - Vandal-proof Mini Dome Camera		
			72 - Pro Dome Camera		
			71 - PTZ Dome Camera		
			83 - IR Mini Dome Camera		

Note: In a sequence from top to bottom

Network Video Recorder

(Model): **MS-N7032-UPH --- 32-channel 4K H.265 PoE NVR**

MS-N	7	032 -	U	P	H
1 - 2 * HDD (2.5") or 1 * HDD (3.5)	7	004 - 4-CH 008 - 8-CH 016 - 16-CH 032 - 32-CH 048 - 48-CH 064 - 64-CH	U - 4K	P - PoE	C/E/H/G - H.265 Compression

PoE Switch

(Model): MS-S0224-GL --- 24-port PoE Switch

MS-S	02	24 -	G	L
02 - 2 * Uplink Ports	04 - 4 * PoE Ports	E - 10/100 Mbps Uplink Port	F - Optical Fiber Port (SFP)	
04 - 4 * Uplink Ports	08 - 8 * PoE Ports	G - Gigabit Uplink Port	L - Extend Mode	
	16 - 16 * PoE Ports			
	24 - 24 * PoE Ports			

CCTV Router

(Model): UR32 - L04EU-G-P-W-RS485

UR32 -	L	04 -	EU -	G-P-W	- RS485
Model Name	Cellular Network Type	Modem Manufacturer & Model	Operating Region	Function	(For UR32 Only)
UR32S	L: 4G LTE		EU: EMEA/Pacific Asia (5G)	G: GPS	Add RS-485 Serial Interface
UR32	5: 5G		AU: South America and Australia	P: PoE	
UR35			AF: North America FirstNet	W: Wi-Fi	
UR75			AE: Asia/Europe/Australia		
UF31			GL: Global		
UF51					

4G Solar-powered Traffic Sensing Camera

(Model): SC211-NA

SC	2	1	1 -	NA
Series	Application Scenarios	Core Technology	Camera Type	4G Module Supported Region
Sensing Camera	2 - Intelligent Traffic	1 - AI Chipset	(2_)1-4G Solar-powered Sensing Camera	NA- North America EU-Europe, the Middle East and Africa AU-Latin America, Australia and New Zealand

