

# 4K/H.265+ Solution



ONVIF | CMST

V1.5.2





### 4G Solar-powered Traffic Sensing Camera

Picture	Model	Resolution	Lens	Field of View	Optimal Capture Distance	Capture Range	Capture Speed Maximum	IP&IK Rating	Listino €	Features
	SC211-EU (1/2.8")	2MP 1920*1080	Fixed Lens 16mm	H19.4° D22.2° V11°	15m~20m	10m~25m	70km/h	IP66	€ 3251,00	<ul style="list-style-type: none"> <li>* Support 4G LTE; Nano SIM: SD card, up to 256G; MQTT&amp;HTTP Protocol</li> <li>* Adjustable Pole Mount Bracket, Anti-theft Mounting Design</li> <li>* Solar-powered supported</li> <li>* 7.2V, 6400mAh, 46.08Wh battery and USB Type-C Power Supply</li> <li>* Built-in High-accuracy GPS Module</li> <li>* Radar Trigger Technology and Intelligent Algorithm Confirmation</li> <li>* Vehicle Capture, Quick Start Capture</li> <li>* Low-power operation mode and working mode switch automatically</li> <li>* Equipped with WiFi for web GUI configuration</li> <li>* Operational Temperature: -20°C ~60°C</li> <li>* IR Wave Length: 850nm (Default)</li> </ul> <p>Optional:</p> <ul style="list-style-type: none"> <li>* 6mm lens optional (Entrance &amp; Exit/Turning Recommended) Capture Range: 3~15m</li> <li>Capture Speed Maximum: 30km/h</li> <li>* IR Wave Length: 740nm</li> </ul>


### Solar-powered Series

Picture	Model	Resolution	Lens	Field of View	IR Distance	IR Wave Length	Capture Speed Maximum	IP&IK Rating	Listino €	Features
	SP111 PN: 41/LTE-NA (1/2.8")	4MP 2688*1520 @15fps	Fixed Lens 2.8mm/6mm	H111°/D128°/V61° (2.8mm) H52.8°/D60.4°/V29.7° (6mm)	Up to 20m	850nm	/	IP67	€ 3219,00	<ul style="list-style-type: none"> <li>* Support 4G LTE; Nano SIM; microSD, up to 1TB; MQTT&amp;HTTP Protocol</li> <li>* Solar-powered supported</li> <li>* Built-in High-accuracy GPS Module</li> <li>* Support Object Classes, Intrusion Detection, Line Crossing, Advanced Motion Detection, Tamper Detection</li> <li>* Intelligent Algorithm Confirmation</li> <li>* Operational Temperature: Charging: -20°C ~45°C, Discharging: -20°C ~60°C</li> <li>* IR Wave Length: 850nm</li> </ul> <p>Optional:</p> <ul style="list-style-type: none"> <li>* Modular Battery B90</li> <li>* Solar Power Modules SPK1S90836</li> <li>* Solar Pannel Modules ZM90M10-2451</li> <li>* Power adapter XLG-75-12-A</li> </ul>
	SP111 PN: 41L/LTE-NA (1/2.8")	4MP 2688*1520 @15fps	Fixed Lens 16mm	H19.4°/D22.2°/V11° (16mm)	Up to 20m	850nm 740nm	70km/h	IP67	€ 4019,00	<ul style="list-style-type: none"> <li>* Support 4G LTE; Nano SIM; microSD, up to 1TB; MQTT&amp;HTTP Protocol</li> <li>* Solar-powered supported</li> <li>* Built-in High-accuracy GPS Module</li> <li>* No-plate Vehicle Capture, License Plate Recognition, Vehicle type Recognition</li> <li>* Intelligent Algorithm Confirmation</li> <li>* Operational Temperature: Charging: -20°C ~45°C, Discharging: -20°C ~60°C</li> <li>* IR Wave Length: 850nm ,740nm</li> </ul> <p>Optional:</p> <ul style="list-style-type: none"> <li>* Modular Battery B90</li> <li>* Solar Power Modules SPK1S90836</li> <li>* Solar Pannel Modules ZM90M10-2451</li> <li>* Power adapter XLG-75-12-A</li> </ul>

### 4G Solar-powered Security Camera Kit

Picture	Model	Series	Resolution	Lens	Solar Power Modules			IP&IK Rating	Listino €	Features
					Bracket	Battery box B36	Solar Panel S90			
	<b>SP111 S90B36</b> PN: 41L/LTE-NA (1/2.8")	Smart Event	4MP 2688*1520 @15fps	Fixed Lens 2.8mm/6mm	✓	4*90Wh Battery	✓	IP67	€ 5.350,00	<ul style="list-style-type: none"> <li>* SP111 with Solar Power Modules SPK1S90B36</li> <li>* All-in-One Wireless Solution</li> <li>* Battery: Achieve up to 9 days of extended standby time</li> <li>* Intelligent Energy-saving Operation Mode: Performance Mode/Sleep Mode/Eco Mode</li> <li>* Advanced AI algorithms enable precise detection and alerting of abnormal situations</li> </ul>
	SP111 S90B36 PN: 41L/LTE-NA (1/2.8")	ANPR	4MP 2688*1520 @15fps	Fixed Lens 16mm	✓	4*90Wh Battery	✓	IP67	€ 7.683,00	<ul style="list-style-type: none"> <li>* Effortless Modular Installation</li> <li>* Capable of withstanding up to level 12 winds</li> </ul>
	SP111 B36 PN: 41L/LTE-NA (1/2.8")	Smart Event	4MP 2688*1520 @15fps	Fixed Lens 2.8mm/6mm	✓	4*90Wh Battery	N/A	IP67	€ 4.869,00	<ul style="list-style-type: none"> <li>* SP111 with Solar Power Modules SPK1B36</li> <li>* All-in-One Wireless Solution</li> <li>* Battery: Achieve up to 9 days of extended standby time</li> <li>* Intelligent Energy-saving Operation Mode: Performance Mode/Sleep Mode/Eco Mode</li> <li>* Advanced AI algorithms enable precise detection and alerting of abnormal situations</li> </ul>
	SP111 B36 PN: 41L/LTE-NA (1/2.8")	ANPR	4MP 2688*1520 @15fps	Fixed Lens 16mm	✓	4*90Wh Battery	N/A	IP67	€ 5.670,00	<ul style="list-style-type: none"> <li>* Effortless Modular Installation</li> <li>* Capable of withstanding up to level 12 winds</li> </ul>

### AI Color<sup>+</sup> Vandal-proof Mini Bullet Network Camera

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	Illumination Distance	IP&IK Rating	Listino €	Features
	<b>Starlight</b> MS-C2964-UPD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H109° D125° V61°	Color: 0.001Lux @F1.0	120dB	30m	IP67 IK10	€ 345,00	<ul style="list-style-type: none"> <li>* Full-color Image Performance</li> <li>* F1.0 Super Aperture</li> <li>* Support PoE; SD card, up to 1TB; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264</li> <li>* Video Content Analysis</li> <li>* Crossing Line People Counting</li> </ul>
	<b>Starlight</b> MS-C5364-UPD	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H104° D129° V78°	Color: 0.002Lux @F1.0	120dB	30m	IP67 IK10	€ 416,00	
	<b>4K</b> MS-C8164-UPD	8MP(4K) 3840*2160 @30fps	Fixed Lens 2.8mm	H108° D125° V60°	Color: 0.005Lux @F1.0	120dB	30m	IP67 IK10	€ 499,00	

### AI Mini Series

#### AI IR Mini Dome Network Camera

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	<b>Starlight</b> MS-C2983-PD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H111° D128° V61°	Color: 0.005Lux @F1.6	120dB	20m	N/A	269,00	<ul style="list-style-type: none"> <li>* Support PoE; Built-in Microphone; SD card, up to 1TB; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264;</li> <li>* Video Content Analysis</li> <li>* Crossing Line People Counting</li> </ul> <p>Optional:</p> <ul style="list-style-type: none"> <li>* Lens 4mm/6mm, Black Housing</li> <li>* No Built-in Microphone</li> </ul>
	<b>Starlight</b> <b>MS-C4583-PD</b>	4MP 2688*1520 @30fps	Fixed Lens 2.8mm	H106° D124° V58°	Color: 0.005Lux @F1.6	120dB	20m	N/A	316,00	
	<b>Starlight</b> <b>MS-C5383-PD</b> <b>MS-C5383-PD/N</b>	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	20m	N/A	340,00	
	<b>Starlight</b> MS-C8183-PD	8MP(4K) 3840*2160 @30fps	Fixed Lens 2.8mm	H110° D126° V60°	Color: 0.012Lux @F1.6	120dB	20m	N/A	425,00	






#### AI Vandal-proof Mini Dome Network Camera

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	<b>Starlight</b> MS-C2973-PD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H111° D128° V61°	Color: 0.005Lux @F1.6	120dB	30m	IP67 IK10	279,00	<ul style="list-style-type: none"> <li>* Support PoE; Built-in Microphone; SD card, up to 1TB; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264;</li> <li>* Video Content Analysis</li> <li>* Crossing Line People Counting</li> </ul> <p>Optional:</p> <ul style="list-style-type: none"> <li>* Lens 4mm/6mm, Black Housing</li> <li>* No Built-in Microphone</li> </ul>
	<b>Starlight</b> MS-C4573-PD	4MP 2688*1520 @30fps	Fixed Lens 2.8mm	H106° D124° V58°	Color: 0.005Lux @F1.6	120dB	30m	IP67 IK10	326,00	
	<b>Starlight</b> MS-C5373-PD	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	30m	IP67 IK10	354,00	
	<b>Starlight</b> MS-C8173-PD	8MP(4K) 3840*2160 @30fps	Fixed Lens 2.8mm	H110° D126° V60°	Color: 0.012Lux @F1.6	120dB	30m	IP67 IK10	435,00	

**AI Vandal-proof Mini Bullet Network Camera**

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-C2964-PD	<b>2MP</b> 1920*1080 @30fps	Fixed Lens 2.8mm	H111° D128° V61°	Color: 0.005Lux @F1.6	120dB	30m	IP67 IK10	279,00	<ul style="list-style-type: none"> <li>* Support PoE; SD card, up to 1TB; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264;</li> <li>* Video Content Analysis</li> <li>* Crossing Line People Counting</li> </ul>
	 <b>MS-C4564-PD</b>	<b>4MP</b> 2688*1520 @30fps	Fixed Lens 2.8mm	H106° D124° V58°	Color: 0.005Lux @F1.6	120dB	30m	IP67 IK10	326,00	
	 <b>MS-C5364-PD-JB</b> <b>MS-C5364-PD-JB/N</b>	<b>5MP</b> 2592*1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	30m	IP67 IK10	378,00	
	 <b>MS-C8164-PD-JB</b>	<b>8MP(4K)</b> 3840*2160 @30fps	Fixed Lens 2.8mm	H110° D126° V60°	Color: 0.012Lux @F1.6	120dB	30m	IP67 IK10	458,00	

**AI Weather-proof Mini Dome Network Camera**

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-C2975-PD	<b>2MP</b> 1920*1080 @30fps	Fixed Lens 2.8mm	H111° D128° V61°	Color: 0.005Lux @F1.6	120dB	25m	IP67 IK10	293,00	<ul style="list-style-type: none"> <li>* Support PoE; Built-in Microphone; SD card, up to 1TB; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264;</li> <li>* Video Content Analysis</li> <li>* Crossing Line People Counting</li> </ul> <p>Optional:</p> <ul style="list-style-type: none"> <li>* Lens 4mm/6mm, Black Housing</li> <li>* No Built-in Microphone</li> </ul>
	 <b>MS-C4575-PD</b>	<b>4MP</b> 2688x1520 @30fps	Fixed Lens 2.8mm	H106° D124° V58°	Color: 0.005Lux @F1.6	120dB	25m	IP67 IK10	335,00	
	 <b>MS-C5375-PD-JB</b> <b>MS-C5375-PD-JB/N</b>	<b>5MP</b> 2592*1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	25m	IP67 IK10	411,00	
	 <b>MS-C8175-PD-JB</b>	<b>8MP(4K)</b> 3840*2160 @30fps	Fixed Lens 2.8mm	H110° D126° V60°	Color: 0.012Lux @F1.6	120dB	25m	IP67 IK10	482,00	

**AI Weather-proof Mini Bullet Network Camera**

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	  MS-C2963-RPE	<b>2MP</b> 1920*1080 @60fps	Fixed Lens 4mm	H91° D106° V50°	Color: 0.005Lux @F1.6	140dB	50m	IP67 IK10	416,00	<ul style="list-style-type: none"> <li>* Support PoE; SD card, up to 1TB; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264</li> <li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map,Face Detection</li> </ul> <p>Optional:</p> <ul style="list-style-type: none"> <li>* Lens 2.8mm/6mm</li> <li>* Black Housing</li> </ul>
	 <b>MS-C5363-PE</b>	<b>5MP</b> 2592*1944 @30fps	Fixed Lens 2,8mm	H86° D108° V63°	Color: 0.008Lux @F1.6	120dB	50m	IP67 IK10	439,00	
	 <b>MS-C5363-PE/4</b> <b>MS-C5363-PE/4/N</b>	<b>5MP</b> 2592*1944 @30fps	4mm						491,00	
	 <b>MS-C8163-PE</b>	<b>8MP(4K)</b> 3840*2160 @30fps	Fixed Lens 4mm	H91° D106° V50°	Color: 0.012Lux @F1.6	120dB	50m	IP67 IK10	477,00	

**AI Motorized Dome Network Camera**

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-C2975-RFPD	<b>2MP</b> 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H111°~H34° D130°~D39° V60°~V19°	Color: 0.005Lux @F1.4	120dB	50m	IP67 IK10	491,00	<ul style="list-style-type: none"> <li>* Support PoE; Built-in Microphone; SD card, up to 1TB; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264;</li> <li>* Video Content Analysis</li> <li>* Crossing Line People Counting</li> </ul> <p>Optional:</p> <ul style="list-style-type: none"> <li>* Black Housing</li> <li>* No Built-in Microphone</li> <li>* Junction Box A84</li> </ul>
	 <b>MS-C4575-FPD</b>	<b>4MP</b> 2688*1520 @30fps	Motorized lens 2.7~13.5mm	H97°~H28° D110°~D32° V55°~V16°	Color: 0.005Lux @F1.4	120dB	50m	IP67 IK10	505,00	
	 <b>MS-C5375-FPD</b> <b>MS-C5375-FPD/N</b>	<b>5MP</b> 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H99°~H31° D124°~D38° V72°~V23°	Color: 0.008Lux @F1.4	120dB	50m	IP67 IK10	510,00	
	 <b>MS-C8175-FPD</b>	<b>8MP(4K)</b> 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H107°~H33° D125°~D37° V58°~V18°	Color: 0.012Lux @F1.4	120dB	50m	IP67 IK10	605,00	






**AI Motorized Bullet Network Camera**

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Partner	Features
	  MS-C2964-RFPE	<b>2MP</b> 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H111°~H34° D130°~D39° V60°~V19°	Color: 0.005Lux @F1.4	140dB	50m	IP67 IK10	510,00	<ul style="list-style-type: none"> <li>* Support PoE; SD card, up to 1TB; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264</li> <li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map,Face Detection</li> </ul> <p>Optional:</p> <ul style="list-style-type: none"> <li>* Black Housing</li> </ul>
	 <b>MS-C5364-FPE</b>	<b>5MP</b> 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H99°~H31° D124°~D38° V72°~V23°	Color: 0.008Lux @F1.4	120dB	50m	IP67 IK10	548,00	
	 <b>MS-C8164-FPE</b>	<b>8MP(4K)</b> 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H107°~H33° D125°~D37° V58°~V18°	Color: 0.012Lux @F1.4	120dB	50m	IP67 IK10	614,00	

AI Motorized Pro Dome Network Camera

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-C2972-RFPE (1/2.8")	2MP 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H115°~H34° D135°~D39° V62°~V19°	Color: 0.005Lux @F1.4	140dB	50m	IP67 IK10	629,00	* Support PoE; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Support Multi-Interface Cable Versions * Integrated Cable Management * Multi port: Built-in Mic, Alarm I/O, Audio out, Ethernet Port(PoE), DC 12V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People) ,Heat Map,Face Detection  Optional: * Black Housing , Smoked Dome Cover AC-72 * No Built-in Microphone
	 MS-C4472-RFPE (1/1.8")	4MP 2688*1520 @60fps	Motorized lens 3.6~10mm	H96°~H42° D111°~D48° V55°~V23°	Color: 0.002Lux @F1.4	140dB	50m	IP67 IK10	884,00	
	 MS-C5372-FPE (1/2.8")	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H89°~H30° D111°~D37° V66°~V22°	Color: 0.008Lux @F1.4	120dB	50m	IP67 IK10	662,00	
	 MS-C6772-FPE (1/2.4")	6MP 3200*1800 @30fps	Motorized lens 2.7~13.5mm	H112°~H38° D129°~D44° V61°~V22°	Color: 0.005Lux @F1.6	120dB	50m	IP67 IK10	695,00	
	 MS-C8172-FPE (1/2.8")	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H96°~H33° D112°~D37° V53°~V18°	Color: 0.012Lux @F1.4	120dB	50m	IP67 IK10	713,00	
 MS-C8272-FPE (1/1.8")	8MP(4K) 3840*2160 @30fps	Motorized lens 3.6~10mm	H110°~H46° D126°~D54° V61°~V25°	Color: 0.009Lux @F1.4	120dB	50m	IP67 IK10	874,00		





AI Motorized Pro Bullet Network Camera

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-C2962-RFPE (1/2.8")	2MP 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H92°~H32° D107°~D37° V51°~V18°	Color: 0.005Lux @F1.4	140dB	60m	IP67	633,00	* Support PoE; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi Port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People) ,Heat Map,Face Detection  Optional: * Junction Box A62 * Black Housing: € 49,00
	 MS-C5362-FPE (1/2.8")	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H89°~H30° D111°~D37° V66°~V22°	Color: 0.008Lux @F1.4	120dB	60m	IP67	670,00	
	 MS-C6762-FPE (1/2.4")	6MP 3200*1800 @30fps	Motorized lens 2.7~13.5mm	H112°~H38° D129°~D44° V61°~V22°	Color: 0.005Lux @F1.6	120dB	60m	IP67	700,00	
	 MS-C8162-FPE (1/2.8")	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H96°~H33° D112°~D37° V53°~V18°	Color: 0.012Lux @F1.4	120dB	60m	IP67	719,00	






AI Motorized Pro Bullet Plus Network Camera

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-C2966-RFPE (1/2.8")	2MP 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H113°~H33° D130°~D38° V60°~V18°	Color: 0.005Lux @F1.4	140dB	65m	IP67 IK10	680,00	* Support PoE; SD card, up to 1TB; 3-Axis Design; 4KV Surge Protection, * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi Port: Alarm I/O, Audio I/O, Ethernet Port(PoE), DC 12V * Video Content Analysis, Object Counting(People&Vehicle), Heat Map,Face Detection  Optional: * Black Housing: € 49,00 * Fire Smoke Detection or Hard Hat Detection (Only one of the two functions can be fulfilled at the same time.)
	 MS-C4466-RFPE (1/1.8")	4MP 2688*1520 @60fps	Motorized lens 3.6~10mm	H100°~H45° D116°~D51° V57°~V25°	Color: 0.002Lux @F1.4	140dB	65m	IP67 IK10	893,00	
	 MS-C5366-FPE (1/2.8")	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H113°~H33° D138°~D42° V83°~V25°	Color: 0.008Lux @F1.4	120dB	65m	IP67 IK10	725,00	
	 MS-C6766-FPE (1/2.4")	6MP 3200*1800 @30fps	Motorized lens 2.7~13.5mm	H112°~H38° D129°~D44° V61°~V22°	Color: 0.005Lux @F1.6	120dB	65m	IP67 IK10	747,00	
	 MS-C8166-FPE (1/2.8")	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H110°~H33° D128°~D38° V60°~V18°	Color: 0.012Lux @F1.4	120dB	65m	IP67 IK10	765,00	
	 MS-C8266-FPE (1/1.8")	8MP(4K) 3840*2160 @30fps	Motorized lens 3.6~10mm	H116°~H48° D134°~D55° V65°~V27°	Color: 0.009Lux @F1.4	120dB	65m	IP67 IK10	935,00	


AI 4X/12X Pro Bullet Plus Network Camera

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-C2966-X12RPE (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	180m	IP67 IK10	775,00	* Support PoE; SD card, up to 1TB; 3-Axis Design; 4KV Surge Protection, * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi Port: Alarm I/O, Audio I/O, Ethernet Port(PoE), DC 12V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map,Face Detection
	 MS-C4466-X4RPE (1/1.8")	4MP 2688*1520 @60fps	4X AF Lens 8~32mm	H44°~H13° D51°~D15° V25°~V7°	Color: 0.002Lux @F1.6	140dB	180m	IP67 IK10	1.040,00	
	 MS-C5366-X12PE (1/2.8")	5MP 2592*1944 @30fps	12X AF Lens 5.3~64mm	H57°~H4° D69°~D5° V44°~V1°	Color: 0.008Lux @F1.6	120dB	180m	IP67 IK10	809,00	
	 MS-C8266-X4PE (1/1.8")	8MP(4K) 3840*2160 @30fps	4X AF Lens 8~32mm	H44°~H13° D51°~D15° V25°~V7°	Color: 0.009Lux @F1.6	120dB	180m	IP67 IK10	809,00	







## AI Panoramic Series

AI 180° Panoramic Mini Dome Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	Starlight MS-C5376-PE	5MP 2592*1944 @30fps	Fixed Lens 1.68mm	H180° V95°	Color: 0.008Lux @F2.0	120dB	15m	IP67 IK10	581,00	* Support PoE; Built-in Microphone; SD card, up to 1TB * Support H.265 + /H.265/H.264 + /H.264 * Integrated Junction Box * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map
	4K MS-C8176-PE	8MP(4K) 3840*2160 @25fps	Fixed Lens 1.68mm	H180° V86°	Color: 0.012Lux @F2.0	120dB	15m	IP67 IK10	619,00	Optional: * Black Housing * No Built-in Microphone
AI 180° Panoramic Mini Bullet Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	Starlight MS-C5365-PE	5MP 2592*1944 @30fps	Fixed Lens 1.68mm	H180° V95°	Color: 0.008Lux @F2.0	120dB	15m	IP67 IK10	595,00	* Support PoE; Built-in Microphone; SD card, up to 1TB * Support H.265 + /H.265/H.264 + /H.264 * Integrated Junction Box * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map
	4K MS-C8165-PE	8MP(4K) 3840*2160 @25fps	Fixed Lens 1.68mm	H180° V86°	Color: 0.012Lux @F2.0	120dB	15m	IP67 IK10	633,00	Optional: * Black Housing * No Built-in Microphone
AI 360° Panoramic Fisheye Network Camera										
Picture	Model	Imaging Device	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	4K MS-C8274-PA (1/1.8")	1/1.8" 4K CMOS	Fixed Lens 1.5mm	Ceiling: 360° Wall: 180° Flat: 360°	Color: 0.008Lux @F1.8	120dB	15m	IP67 IK10	893,00	* Support PoE; Built-in Microphone; SD card, up to 256G * Support H.265 + /H.265/H.264 + /H.264 * Support Built-in Mic * Video Content Analysis, People Counting, Heat Map, People Flow Analysis Optional: * No Built-in Microphone
	Starlight MS-C9674-PA (1/1.7")	1/1.7" 12MP CMOS	Fixed Lens 1.98mm	Ceiling: 360° Wall: 180° Flat: 360°	Color: 0.05Lux @F2.8	120dB	15m	IP67 IK10	1.356,00	* Support PoE; Built-in Microphone; SD card, up to 256G * Support H.265 + /H.265/H.264 + /H.264 * Multi Port: Built-in Mic, Alarm I/O, Audio I/O, Ethernet Port(PoE), DC 12V * Video Content Analysis, People Counting, Heat Map, People Flow Analysis Optional: * No Built-in Microphone
AI Dual-sensor 180° Panoramic Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	4K MS-C8477-PC	8MP 5084*1520 @25fps	Fixed Lens 4mm	H180° V50°	Color: 0.002Lux @F1.6	140dB	30m	IP67 IK10	959,00	* Support PoE; Built-in Microphone; SD card, up to 1TB * Support H.265 + /H.265(HEVC)/H.264 + /H.264 * Intrusion Detection, Motion Detection, Heat Map Optional: * Wall Mount Bracket A72(V2) * Pendant Mount A76(V2) * No Built-in Microphone
4x5MP AI Multi-directional Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	Stock MS-C5321-FPE	20MP(4*5MP) 2592*1944 @30fps	Motorized lens 3.2~8.1mm	H87° ~ H40° D109° ~ D49° V64° ~ V30°	0.005Lux @F1.6	120dB	30m	IP66 IK10	2.900,00	* COMS 1/2.8" * Four lenses each support configuring VCA function: Intrusion Detection, Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, line Crossing, Loitering, Object Left, Object Removed * Support target classification: Human, Motor Vehicle(Car, Motorcycle, Bus, Truck), Non-moto Vehide (Scooter) * Support PoE; SD card; up to 2*1TB * Support Scooter Detection, Every Angle with Flexible Positioning * Built-in 360° IR LED, Integrated Interface Management, Convenient and Simplified, Configuration(Support WIFI connection) Optional: * Pole Mount A44 * Pendant Mount A79 Compatible solamente con sistemi VMS (No NVR)





AI 12X PTZ Bullet Network Camera

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	 MS-C2961-X12RPE (1/2.8")	<b>2MP</b> 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	140m	IP66	973,00	* Support PoE; SD card, up to 1TB; IR LEDs & White LEDs; * Support H.265 + /H.265/H.264 + /H.264; * 12X Optical Zoom, PTZ Position Display, 3D positioning, * 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360° Pan Range; Pan Manual Speed: 0.1°~50°/s, Preset Speed: 50°/s * -45°~30° / Tilt Manual Speed: 0.1°~25°/s, Tilt Preset Speed: 25°/s * DC + PoE + Alarm (Default), DC + PoE + Audio (Optional) * Wall Mount Bracket (Default), Pedestal Mount Bracket (Optional) * AI Based Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection  Optional: * Junction Box A62
	 <b>Stock</b> MS-C5361-X12PE (1/2.8")	<b>5MP</b> 2592*1944 @30fps	12X AF Lens 5.3~64mm	H57°~H4° D69°~D5° V44°~V1°	Color: 0.008Lux @F1.6	120dB	140m	IP66	1.021,00	







AI 12X/20X/23X PTZ Bullet Plus Network Camera

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	 MS-C4467-X20RPE (1/1.8")	<b>4MP</b> 2688*1520 @60fps	20X AF Lens 6.4~128mm	H60°~H3° D67°~D4° V37°~V1°	Color: 0.002Lux @F1.6	140dB	180m	IP66	1.739,00	* Support PoE; SD card, up to 1TB; * Support H.265 + /H.265/H.264 + /H.264; * New-generation PTZ Motor; * 12X/20X/23X Optical Zoom; PTZ Position Display, 3D positioning, * 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360° Pan Range; Pan Manual Speed: 0.1°~60°/s, Preset Speed: 60°/s * -45°~30° / Tilt Manual Speed: 0.1°~30°/s, Tilt Preset Speed: 30°/s * Multi port: Alarm I/O, Audio I/O, Ethernet Port(PoE), DC 12V * AI Based Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Vehicle Counting.  Optional: * Junction Box A62
	 <b>Stock</b> MS-C5367-X12PE (1/2.8")	<b>5MP</b> 2592*1944 @30fps	12X AF Lens 5.3~64mm	H57°~H4° D69°~D5° V44°~V1°	Color: 0.008Lux @F1.6	120dB	180m	IP66	1.266,00	
	 MS-C5367-X23PE (1/2.8")	<b>5MP</b> 2592*1944 @30fps	23X AF Lens 5~117mm	H55°~H3° D68°~D4° V42°~V2°	Color: 0.008Lux @F1.5	120dB	180m	IP66	1.314,00	
	 MS-C8267-X20PE (1/1.8")	<b>8MP(4K)</b> 3840*2160 @30fps	20X AF Lens 6.4~128mm	H60°~H3° D67°~D4° V37°~V1°	Color: 0.009Lux @F1.6	120dB	180m	IP66	2.126,00	






AI 12X/20X/23X PTZ Dome Network Camera

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-C2971-X12RPE (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	160m	IP66 IK10	1.243,00	* Support PoE; SD card, up to 1TB, 4KV Surge Protection * Support H.265 + /H.265/H.264 + /H.264 * 12X/20X/23X optical zoom, PTZ Position Display, 3D positioning, * 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360° endless Pan, Pan Manual Speed: 0.1~350°/s, Preset Speed: 350°/s * -5°~90° Tilt, Tilt Manual Speed: 0.1~360°/s, Preset Speed: 360°/s * Multi Port: Alarm I/O, Audio I/O, DC 12V * AI Based Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection
	 MS-C2971-X23RPE (1/2.8")	2MP 1920*1080 @60fps	23X AF Lens 5~117mm	H60°~H3° D69°~D4° V35°~V2°	Color: 0.005Lux @F1.5	140dB	160m	IP66 IK10	1.314,00	
	 MS-C5371-X12PE (1/2.8")	5MP 2592*1944 @30fps	12X AF Lens 5.3~64mm	H57°~H4° D69°~D5° V44°~V1°	Color: 0.008Lux @F1.6	120dB	160m	IP66 IK10	1.290,00	







AI 25X/30X/36X/42X Speed Dome Network Camera

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-C4441-X36RPE (1/1.8")	4MP 2688*1520 @60fps	36X AF Lens 5~205.3mm	H62°~H3° D70°~D3° V37°~V1°	Color: 0.008Lux @F1.55	120dB	300m	IP66 (IK10)	3.048,00	* Support PoE; SD card, up to 1TB, 6KV Surge Protection, Heater * Support H.265 + /H.265/H.264 + /H.264 * 25X/30X/36X/42X Optical Zoom; PTZ Position Display, 3D positioning, * 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360°endless / Pan Manual Speed: 0.1~250°/s, Pan Preset Speed: 250°/s * -5°~90°(Auto Flip) / Tilt Manual Speed: 0.1~160°/s, Tilt Preset Speed: 160°/s * Multi port: RS485, Alarm I/O*4/2, Audio I/O, AC 24V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Vehicle Counting * Wall Mount Bracket A41 (Default)
	 MS-C5341-X25PE (1/2.8")	5MP 2592*1944 @30fps	25X AF Lens 4.8~120mm	H57°~H2.8° D69.8°~D3.6° V43.8°~V1.8°	Color: 0.008Lux @F1.5	120dB	200m	IP66 (IK10)	1.555,00	
	 MS-C5341-X30PE (1/2.8")	5MP 2592*1944 @30fps	30X AF Lens 4.7~141mm	H58°~H3° D71°~D3° V44°~V2°	Color: 0.008Lux @F1.5	120dB	200m	IP66 (IK10)	2.055,00	
	 MS-C5341-X42PE (1/2.8")	5MP 2592*1944 @30fps	42X AF Lens 7~300mm	H43°~H2° D53°~D2° V33°~V1°	Color: 0.008Lux @F1.8	120dB	300m	IP66 (IK10)	4.361,00	
	 MS-C8241-X36PE (1/1.8")	8MP(4K) 3840*2160 @30fps	36X AF Lens 5.7~205.2mm	H66°~H3° D72°~D3° V41°~V1°	Color: 0.009Lux @F1.55	120dB	300m	IP66 (IK10)	3.270,00	





AI 30X/36X/42X Wiper Speed Dome Network Camera

Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-C4441-X36RPE /W (1/1.8")	4MP 2688*1520 @60fps	36X AF Lens 5~205.3mm	H62°~H3° D70°~D3° V37°~V1°	Color: 0.008Lux @F1.55	120dB	300m	IP66	3.048,00	* Smart Rain-sensing Wiper * Support PoE; SD card, up to 1TB, 6KV Surge Protection, Heater * Support H.265 + /H.265/H.264 + /H.264 * 30X/36X/42X Optical Zoom; PTZ Position Display, 3D positioning, 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360°endless / Pan Manual Speed: 0.1~250°/s, Pan Preset Speed: 250°/s * -5°~90°(Auto Flip) / Tilt Manual Speed: 0.1~160°/s, Tilt Preset Speed: 160°/s * Multi port: RS485, Alarm I/O *4/2, Audio I/O, AC 24V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Vehicle Counting * Wall Mount Bracket A41 (Default)
	 MS-C5341-X30PE /W (1/2.8")	5MP 2592*1944 @30fps	30X AF Lens 4.7~141mm	H58°~H3° D71°~D3° V44°~V2°	Color: 0.008Lux @F1.5	120dB	300m	IP66	2.055,00	
	 MS-C5341-X42PE /W (1/2.8")	5MP 2592*1944 @30fps	42X AF Lens 7~300mm	H43°~H2° D53°~D2° V33°~V1°	Color: 0.008Lux @F1.8	120dB	300m	IP66	4.361,00	
	 MS-C8241-X36PE /W (1/1.8")	8MP(4K) 3840*2160 @30fps	36X AF Lens 5.7~205.2mm	H66°~H3° D72°~D3° V41°~V1°	Color: 0.009Lux @F1.55	120dB	300m	IP66	3.270,00	

5G AIoT Series

AIoT 12X Pro Bullet Plus Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	MS-C2966-X12ROPC -915M (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	180m	IP67	989,00	<ul style="list-style-type: none"> <li>* Built-in LoRaWAN® Gateway</li> <li>* Support Connection with more than 2000 LoRaWAN® Sensors / Nodes from 8 End-Devices Simultaneously</li> <li>* High Capacity, High Compatibility, Embedded Network Server</li> <li>* Support IoT, PoE, SD card, up to 256G; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264</li> <li>* Integrated Cable Management</li> <li>* Multi port: Alarm I/O, Audio I/O, DC 12V</li> <li>* Video Content Analysis, People Counting, Face Detection, Heat Map</li> <li>* IP67 Only for Camera Body</li> </ul>
5G AI Motorized Pro Bullet Plus Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	MS-C2966-RFGPE (1/2.8")	2MP 1920*1080 @60fps	Motorized Lens 2.7~13.5mm	H113°~H33° D130°~D38° V60°~V18°	Color: 0.005Lux @F1.4	140dB	65m	IP67	1.852,00	<ul style="list-style-type: none"> <li>* Support 5G/4G/3G, P2P, Nano SIM</li> <li>* Support PoE, SD card, up to 1TB; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264</li> <li>* Integrated Cable Management</li> <li>* Multi port: Alarm I/O, Audio I/O, DC 12V</li> <li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Heat Map</li> <li>* IP67 Only for Camera Body</li> </ul>
	MS-C8266-FGPE (1/2.8")	8MP(4K) 3840x2160 @30fps	Motorized Lens 3.6~10mm	H116°~H48° D134°~D55° V65°~V27°	Color: 0.009Lux @F1.4	120dB	65m	IP67	2.065,00	<ul style="list-style-type: none"> <li>* Support 5G/4G/3G, P2P, Nano SIM</li> <li>* Support PoE, SD card, up to 1TB; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264</li> <li>* Integrated Cable Management</li> <li>* Multi port: Alarm I/O, Audio I/O, DC 12V</li> <li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Heat Map</li> <li>* IP67 Only for Camera Body</li> </ul>
5G AI 4X/12X Pro Bullet Plus Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	MS-C2966-X12RGPE (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	180m	IP67	1.999,00	<ul style="list-style-type: none"> <li>* Support 5G/4G/3G, P2P, Nano SIM</li> <li>* Support PoE, SD card, up to 1TB; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264</li> <li>* Integrated Cable Management</li> <li>* Multi port: Alarm I/O, Audio I/O, DC 12V</li> <li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Heat Map</li> <li>* IP67 Only for Camera Body</li> </ul>
	MS-C5366-FGPC (1/1.8")	5MP 2592*1944 @30fps	Motorized Lens 2.7~13.5mm	H44°~H13° D51°~D15° V25°~V7°	Color: 0.009Lux @F1.6	120dB	65m	IP67	1.923,00	<ul style="list-style-type: none"> <li>* Support 5G/4G/3G, P2P, Nano SIM</li> <li>* Support PoE, SD card, up to 1TB; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264</li> <li>* Integrated Cable Management</li> <li>* Multi port: Alarm I/O, Audio I/O, DC 12V</li> <li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Heat Map</li> <li>* IP67 Only for Camera Body</li> </ul>
5G AIoT 4X/12X Pro Bullet Plus Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	MS-C2966-X12RGOPC -915M (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	180m	IP67	2.269,00	<ul style="list-style-type: none"> <li>* Built-in LoRaWAN® Gateway</li> <li>* Support Connection with more than 2000 LoRaWAN® Sensors / Nodes from 8 End-Devices Simultaneously</li> <li>* High Capacity, High Compatibility, Embedded Network Server</li> <li>* Support IoT, 5G/4G/3G, P2P, Nano SIM</li> <li>* Support PoE, SD card, up to 256G; 3-Axis Design</li> <li>* Support H.265 + /H.265/H.264 + /H.264</li> <li>* Integrated Cable Management</li> <li>* Multi port: Alarm I/O, Audio I/O, DC 12V</li> <li>* Video Content Analysis, People Counting, Face Detection, Heat Map</li> <li>* IP67 Only for Camera Body</li> </ul>



\* "-915M" / "-868M" / "-470M" under the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.)  
 \* "-915M": KR920 / AS923 / AU915 / US915-4.28dB; "-868M": IN865 / EU868 / RU864-4.52dB; "-470M": CN470-0.87dB


TELECAMERE LETTURA TARGHE											
Immagine	Modello	Ottica	Field of View	Ultra Low-light	WDR	ANPR Distance (Day)	ANPR Distance (Night with Illumination)	IR Distance	Listino €	Caratteristiche	
	MS-C2964-RFLPE	Motorized lens 2.7~13.5mm 2MP 1920*1080 @60fps	H111°~H34° D130°~D39° V60°~V19°	Color: 0.005Lux @F1.4	140dB	25m	20m	Up to 50m	1.389,00 €	<ul style="list-style-type: none"> <li>* Support SD card, up to 256G; 3-Axis Design</li> <li>* Multi Port: Alarm I/O*1+Audio I/O*1+DC 12V+PoE</li> <li>* IP&amp;IK Rating: IP67 - IK10</li> </ul>	
	MIL-MS-A63	STAFFA DA PARETE BULLET MINI								47,00 €	
	TS2966-X12TPE	12X AF Lens 5.3~64mm 1920*1080 @90fps	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	70m	35m	Up to 180m	1.975,00 €	<ul style="list-style-type: none"> <li>* Support SD card, up to 256G; 3-Axis Design</li> <li>* Multi-Port: RS485+Alarm I/O*1+Audio I/O*1+DC 12V +PoE</li> <li>* Integrated Cable Management (Default)</li> <li>* IP&amp;IK Rating: IP67 - IK10</li> </ul>	
	MS-C2866-X4TLPA	4X AF Lens 8~32mm 1920*1080 @90fps	H44°~H13° D51°~D15° V25°~V7°	Color: 0.002Lux@F1.6 B/W: 0Lux with IR on	120Db	60m	30m	Up to 180m	1.914,00 €		





## PoE NVR Series







4K H.265 + Mini PoE NVR 1000 Series										
Picture	Model	Bandwidth	Synchronous playback	PoE Ports	HDD Support	Local display		Alarm I/O	Listino €	Features
						HDMI	VGA			
	<b>PoE</b> MS-N1004-UPC	In:40Mbps Out:40Mbps	1*8MP 1*5MP 4*1080P 4*720P	4	1*10TB (3.5"HDD)	✓	N/A	N/A	383,00	1*RJ45 10/100Mbps 2*USB2.0 Interfaces 220mm(W)×200mm(D)×43.6mm(H) AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup
	<b>PoE</b> MS-N1008-UPC	In:80Mbps Out:80Mbps	1*8MP 1*5MP 4*1080P 8*720P	4	1*10TB (3.5"HDD)	✓	N/A	N/A	383,00	
	<b>PoE</b> MS-N1008-UNPC	In:80Mbps Out:80Mbps	1*8MP 1*5MP 4*1080P 8*720P	4	1*10TB (3.5"HDD)	✓	N/A	N/A	510,00	1*RJ45 100/1000Mbps 2*USB2.0 Interfaces 115mm(W)X115mm(D)X180mm(H) AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup

4K H.265 + PoE NVR 5000 Series (NDAA)										
Picture	Model	Bandwidth	Synchronous playback	PoE Ports	HDD Support	Local display		Alarm I/O	Listino €	Features
						HDMI	VGA			
	<b>PoE</b> MS-N5008-PE	In:80Mbps Out:50Mbps	1*8MP 2*5MP 6*1080P 8*720P	8	2*10TB (3.5"HDD)	✓	✓	4/1	695,00	1*RJ45 100/1000Mbps 2*USB 2.0 Interfaces 1*RCA Audio Input + 1*RCA Audio Output AI Based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup
	<b>PoE</b> MS-N5016-NPE	In:160Mbps Out:160Mbps	3*8MP 4*5MP 12*1080P 16*720P	16	2*10TB (3.5"HDD)	✓	✓	4/1	988,00	


4K H.265 + PoE NVR 7000 Series										
Picture	Model	Bandwidth	Synchronous playback	PoE Ports	HDD Support	Local display		Alarm I/O	Listino €	Features
						HDMI	VGA			
	<b>PoE</b> MS-N7016-PG	In:160Mbps Out:160Mbps	6*8MP 8*6MP 12*4MP 16*1080P	16	4*10TB (3.5"HDD)	✓	✓	16/4	1.611,00	1*RJ45 100/1000Mbps 1*RCA Audio Input + 1*RCA Audio Output 1*RS-485 Series Port for PTZ 1*RS-232 Series Port for Console 1*RS-485 Series Port for Keyboard 1*USB 3.0 Interfaces + 2*USB 2.0 Interfaces * N+1 Hot Spare RAID 0/1/5/6/10 Storage AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup
	<b>PoE</b> MS-N7032-UPH	In:256Mbps Out:256Mbps	4*8MP 6*5MP 16*1080P 32*720P	24	4*10TB (3.5"HDD)	✓	✓	16/4	1.611,00	
	<b>PoE</b> MS-N7048-UPH	In:320Mbps Out:256Mbps	4*8MP 6*5MP 16*1080P 32*720P	24	4*10TB (3.5"HDD)	✓	✓	16/4	1.966,00	

## NVR Series

4K H.265 + Mini NVR 1000 Series										
Picture	Model	Bandwidth	Synchronous playback	RAID	HDD Support	Local display		Audio Alarm	Listino €	Features
						HDMI	VGA			
	MS-N1004-UC	In:40Mbps Out:40Mbps	1*8MP 1*5MP 4*1080P 4*720P	N/A	1*10TB (3.5"HDD)	✓	N/A	N/A	289,00	1*RJ45 10/100Mbps 2*USB 2.0 Interfaces 1*SATA HDD(3.5") support 220mm(W)×220mm(D)×143.6mm(H) AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup
	<b>Stock</b> MS-N1008-UC	In:80Mbps Out:80Mbps	1*8MP 1*5MP 4*1080P 8*720P	N/A	1*10TB (3.5"HDD)	✓	N/A	N/A	289,00	
	<b>Stock</b> MS-N1008-UNC	In:80Mbps Out:80Mbps	1*8MP 1*5MP 4*1080P 8*720P	N/A	2*2TB (2.5"HDD)	✓	N/A	N/A	359,00	1*RJ45 100/1000Mbps 2*USB 2.0 Interfaces 80mm(W)X80mm(D)X120mm(H) AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup  Optional: Black/Gold/Silver Color 2*2.5"HDD Support:


4K H.265 + Pro NVR 5000 Series (NDAA)										
Picture	Model	Bandwidth	Synchronous playback	RAID	HDD Support	Alarm I/O		Listino €	Features	
						HDMI	VGA			
	MS-N5008-NE <i>Stock</i>	In:160Mbps Out:160Mbps	3*8MP 4*5MP 8*1080P 8*720P	N/A	2*10TB (3.5"HDD)	√	√	4/1	506,00	1*RJ45 100/1000Mbps 2*USB 2.0 Interfaces 1*RCA Audio Input + 1*RCA Audio Output
	MS-N5016-NE <i>Stock</i>	In:160Mbps Out:160Mbps	3*8MP 4*5MP 12*1080P 16*720P	N/A	2*10TB (3.5"HDD)	√	√	4/1	569,00	AI Based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup
4K H.265 + Pro NVR 7000 Series										
Picture	Model	Bandwidth	Synchronous playback	RAID	HDD Support	Alarm I/O		Listino €	Features	
						HDMI	VGA			
	MS-N7016-G <i>Stock</i>	In:160Mbps Out:160Mbps	6*8MP 9*5MP 16*1080P 16*720P	0/1/5/6/10	4*10TB (3.5"HDD)	√	√	16/4	1.271,00	2*RJ45 100/1000Mbps 1*RCA Audio Input + 1*RCA Audio Output 1*RS-485 Series Port for PTZ 1*RS-232 Series Port for Console 1*RS-485 Series Port for Keyboard
	MS-N7032-G <i>Stock</i>	In:256Mbps Out:256Mbps	6*8MP 9*5MP 24*1080P 32*720P	0/1/5/6/10	4*10TB (3.5"HDD)	√	√	16/4	1.499,00	1*USB 3.0 Interfaces + 2*USB 2.0 Interfaces AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, N+1 Hot Space, Auto Backup
4K H.265 + Pro NVR 8000 Series										
Picture	Model	Bandwidth	Synchronous playback	RAID	HDD Support	Alarm I/O		Listino €	Features	
						HDMI	VGA			
	MS-N8032-G <i>Stock</i>	In:256Mbps Out:256Mbps	6*8MP 9*5MP 24*1080P 32*720P	0/1/5/6/10	8*10TB (3.5"HDD)	2*HDMI	2*VGA	16/4	1.701,00	2*RJ45 100/1000Mbps 1*RCA Audio Input + 2*RCA Audio Output 1*eSATA Interface 1*RS-485 Series Port for PTZ 1*RS-232 Series Port for Console 1*RS-485 Series Port for Keyboard
	MS-N8064-G <i>Stock</i>	In:320Mbps Out:256Mbps	6*8MP 9*5MP 24*1080P 48*720P	0/1/5/6/10	8*10TB (3.5"HDD)	2*HDMI	2*VGA	16/4	2.290,00	1*USB 3.0 Interfaces + 2*USB 2.0 Interfaces AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, N+1 Hot Space, Auto Backup
Enterprise NVR 1U Series(NDAA)										
Picture	Model	Description			Included Camera Access License			Listino €	Features	
	VE0100-A	Enterprise NVR with 8-CH License, 1 Disk Slots.			* Support 8 video streams per server			1.172,00	* Integrate with Milesight network cameras, sensors and 3rd party network cameras * Support expandable disk capacity of 1*20TB or 2*20TB * Pre-loaded with Milesight VMS Server & Client * N+M Failover ensures data security	
	VE0201-A <i>Stock</i>	Enterprise NVR with 16-CH License, 2 Disk Slots.			* Support 16 video streams per server			1.234,00	* Windows-based operating system * 2*HDMI Port+1*DP Port(Support independent and synchronous display) * Rear panel: 2*USB 2.0, 2*USB 3.0, 1*USB-C Port * AC 100-240V, 50-60Hz, DC 12V	
Enterprise NVR 2U Series(NDAA)										
Picture	Model	Description			Included Camera Access License			Listino €	Features	
	VE0601-A	Enterprise NVR with 16-CH License, 6 Disk Slots.			* Support 16 video streams per server			1.560,00	* Integrate with Milesight network cameras, sensors and 3rd party network cameras * Support up to 6*20TB storage and expandable storage capacity * Pre-loaded with Milesight VMS Server & Client * Central Management for single and multiple sites * N+M Failover ensures data security * Windows-based operating system * 1*PCI-E4 slot;	
	VE0602-A	Enterprise NVR with 32-CH License, 6 Disk Slots.			* Support 32 video streams per server			2.174,00	* 2*SO-DIMM DDR4 2666 Slot (2*4GB /2*8GB Pre-installed) * 1*HDMI Port+1*DP Port(Support independent and synchronous display) * 1*Power Connector(ATX_PWR 24pin) + 1*Power Connector (CPU_PWR 4pin) +1*CPU Fan+1*COM Connector (9pin) +1*Front Panel Connector * 1* HD Audio Connector * Front panel: 2*USB 2.0 +Rear panel: 2*USB 2.0, 2*USB 3.0 * AC 100-240V, 50-60Hz	

### Enterprise NVR 3U Series (NDAA)

Picture	Model	Description	Included Camera Access License	Listino €	Features
	VE1604-A	Enterprise NVR with 64-CH License, 16 Disk Slots.	* Support 64 video streams per server	9.828,00	* Integrate with Milesight network cameras, sensors and 3rd party network cameras * Support up to 16*20TB storage and expandable storage capacity * Pre-loaded with Milesight VMS Server & Client * Central Management for single and multiple sites * N+M Failover ensures data security * Windows-based operating system * Support RAID 0, 1, 5, 6, 10, 50,60 * Support 1*2.5Gbps, 2*100Mbps LAN port * 4 * DDR4 Slot(2*8GB Pre-installed) * 2*HDMI Port, 1*DP Port(Support independent and synchronous display) * 1 * BNC In + 1*BNC Out * Front panel: 2*USB 3.0 + Rear panel: 4*USB 2.0+2*USB 3.2 Gen2 * AC 100-240V, 50-60Hz, redundant power supply
	VE1608-A	Enterprise NVR with 128-CH License, 16 Disk Slots.	* Support 128 video streams per server	12.191,00	








### Keyboard Series

#### Network Keyboard


















Picture	Model	LCD Screen	Joystick	Control Mode	PTZ Control	NVR Control	RS232	RJ45	Listino €	Features
	MS-K01	58x44 (2.8") Blue Screen	4-axis joystick	IP-based	v	r	v	v	1.509,00	Support Milesight NVR + PTZ Camera Support PoE & DC12V, Built-in Web Server Up to 110 Devices Control 1 * RJ45 100/1000Mbps 1 * RS232



### PoE Switch Series

#### PoE Switch

Picture	Model	Ports			Max. PoE Power		Switching Capacity	Extend Mode	Listino €	Features
		PoE Ports	Uplink Ports	SFP Ports	Max Capacity	Single Port				
	MS-S0204-EL	Stock 4X10/100 Mbps	2X100 Mbps	N/A	60W	30W	1.6 Gbps	v	109,00	* PoE Standard: IEEE802.3 af/at * Port Lightning Protection: 4KV 8/20us * Protection Level: IP30
	MS-S0208-EL	8X10/100 Mbps	2X100 Mbps	N/A	120W	30W	2 Gbps	v	170,00	
	MS-S0208-GL	Stock 8X10/100 Mbps	2X1000 Mbps	N/A	120W	30W	11.8 Gbps	v	189,00	
	MS-S0216-GL	Stock 16X10/100 Mbps	2X1000 Mbps	N/A	200W	30W	14.8 Gbps	v	491,00	
	MS-S0224-GL	Stock 24X10/100 Mbps	2X1000 Mbps	N/A	400W	30W	14.8 Gbps	v	695,00	
	MS-S0416-GF	Stock 16X10/100 Mbps	2X1000 Mbps	2X1000 Mbps	250W	30W	14.8 Gbps	N/A	779,00	
	MS-S0424-GF	Stock 24X10/100 Mbps	2X1000 Mbps	2X1000 Mbps	400W	30W	14.8 Gbps	N/A	919,00	

Accessories			
Image	Model	Description	Listino €
	<b>MS-SDKIT</b>	1 * T10 Plum screwdriver    1 * H2.0 Hexagon screwdriver 1 * T20 Plum screwdriver    1* L-shaped hexagon wrench	<b>10,00</b>
	<b>A01 (V2)</b>	<b>Pole Mount with Stainless Steel Straps</b> * Net Weight: 720g    * Dimension: 170*51.5*152.6mm * Installation Environment: For strapping cameras on poles between 102-127 (4.1-5 inches) in diameter. * Applicable Model: AI Motorized Bullet, AI PTZ Bullet Plus, A41, A43, A62, A63, A71, A72, A77	<b>47,00</b>
	<b>A02 (V2)</b>	<b>Pole Mount with Stainless Steel Straps</b> * Net Weight: 1kg    * Dimension: 180*136*46mm * Installation Environment: For strapping cameras on poles between 102-127 (4.1-5 inches) in diameter. * Applicable Model: AI Motorized Bullet, AI PTZ Bullet Plus, AI Dual-sensor 180° Panoramic Network Camera, TrafficX Camera, TrafficX Enforcement Camera	<b>47,00</b>
	<b>A03</b>	<b>External Corner Bracket</b> * Net Weight: 900g    * Dimension: 170*152.5*76mm    * Installation Environment: For mounting cameras on an external corner. * Applicable Model: (AI Weather- Proof)Mini Bullet, AI Vandal-proof Mini Bullet, AI Motorized Bullet, AI 180° Panoramic Mini Bullet&Dome, A41, A62, A63, A71, A72, A77, A43	<b>47,00</b>
	<b>A41</b>	<b>Wall Mount</b> * Net Weight: 400g    * Dimension: 200*129*100mm    * Installation Environment: For wall or parapet installation. * Applicable Model: Speed Dome	<b>71,00</b>
	<b>A42</b>	<b>Pendant Mount</b> * Net Weight: 650g    * Dimension: Ø116.5*255mm    * Installation Environment: For ceiling or horizontal structure. * Applicable Model: Speed Dome	<b>71,00</b>
	<b>A42-L</b>	<b>Extention Lever</b> * Net Weight: 325g    * Dimension: Ø57*255mm    * Installation Environment: Used as extentions for Pendant Mount. * Applicable Model: A42, A79, A76 V2	<b>47,00</b>
	<b>A43</b>	<b>Junction Box</b> * Net Weight: 1000g    * Dimension: 195*164*80mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: A01, A41, A42, A03	<b>95,00</b>
	<b>A44</b>	<b>Pole Mount</b> * Net Weight: 700g    * Dimension: 135*185*315.5mm * Installation Environment: For wall or parapet installation. * Applicable Model: AI Multi-directional Network Camera	<b>71,00</b>
	<b>A62</b>	<b>Junction Box</b> * Net Weight: 510g    * Dimension: 134*126*40mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and preventing from being tampered * Applicable Model: AI Pro Bullet, (Radar) AI Pro Bullet Plus, (5G AIoT) Pro Bullet Plus, AI PTZ Bullet Plus, AI PTZ Bullet(Only for Wall Mount Version), Supplement Light AI Pro Bullet Plus. * Color optional: White (Default) / Black (Optional: \$5)	<b>47,00</b>
	<b>A63</b>	<b>Junction Box</b> * Net Weight: 620g    * Dimension: 134*126*40mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: (AI Weather-proof)Mini Bullet, AI Motorized Mini Bullet * Color optional: White (Default) / Black (Optional)	<b>47,00</b>
	<b>A64</b>	<b>Adapting Plate</b> * Net Weight: 55g    * Dimension: 134*127*40mm * Applicable Model: Panoramic Mini Bullet, Vandal-proof Mini Bullet (Only for junction box version)	<b>10,00</b>
	<b>A71</b>	<b>Wall Mount Bracket</b> * Net Weight: 530g    * Dimension: 162*124*78mm    * Installation Environment: Used to install camera on a wall or vertical structure * Applicable Model: AI IR Mini Dome, AI Vandal-proof Mini Dome, AI Weather-proof Mini Dome, AI 3X AF Motorized Dome, AI Motorized Dome, AI 180° Panoramic mini dome * Color optional: White (Default) / Black (Optional)	<b>47,00</b>
	<b>A72 (V2)</b>	<b>Wall Mount Bracket</b> * Net Weight: 560g    * Dimension: 242*145*133mm    * Installation Environment: For wall or parapet installations * Applicable Model: AI Pro Dome, Fisheye, AI Motorized Dome, AI 180° Mini Panoramic Dome, AI Dual-sensor 180° Panoramic Dome * Color optional: White (Default) / Black (Optional)	<b>71,00</b>
	<b>AC-71</b>	<b>Smoked Dome Cover</b> * Net Weight: 120g    * Dimension: Ø136.8*92.5mm    * Installation Environment: For concealing where a camera is pointed. * Applicable Model: AI PTZ Dome	<b>47,00</b>
	<b>AC-72</b>	<b>Smoked Dome Cover</b> * Net Weight: 39g    * Dimension: Ø100*56mm (4 inch)    * Installation Environment: For concealing where a camera is pointed. * Applicable Model: AI Pro Dome	<b>24,00</b>
	<b>A73</b>	<b>Adapter Plate</b> * Net Weight: 28g    * Dimension: 115*122.5*10mm * Installation Environment: For the installation that cable need to be routed through the side outlet * Applicable Model: AI Vandal-proof Mini Dome * Color optional: White (Default) / Black (Optional)	<b>10,00</b>

Accessories			
Image	Model	Description	Listino €
	A74	<b>Junction Box</b> * Net Weight: 60g * Dimension: 121.5*116.5*37.2mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: AI Vandal-proof Mini Dome * Color optional: White (Default) / Black (Optional)	24,00
	A75	<b>Junction Box</b> * Net Weight: 200g * Dimension: 145*167*33.5mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: AI Pro Dome, AI 360° Panoramic Fisheye * Color optional: White (Default) / Black (Optional)	47,00
	A76(V2)	<b>Pendant Mount</b> * Net Weight: 600g * Dimension: Ø144*L (L is default as 290mm,also can be extended with A42-L) * Installation Environment: Used to install cameras on a ceiling or horizontal structure. * Applicable Model: AI Pro Dome, AI 360° Panoramic Fisheye, AI 3X AF Motorized Dome, AI Motorized Dome, AI 180° Panoramic mini dome, AI Dual-sensor 180° Panoramic Dome	85,00
	A77	<b>Wall Mount</b> * Net Weight: 650g * Dimension: 262*185*138mm * Installation Environment: For wall or parapet installation * Applicable Model: PTZ Dome	85,00
	A78	<b>Recessed Mount</b> * Net Weight: 715g * Dimension: Ø256*94mm * Installation Environment: For in- ceiling installation * Applicable Model: AI PTZ Dome, AI Pro Dome	95,00
	A79	<b>Pendant Mount</b> * Net Weight: 850g * Dimension: Ø185*295mm * Installation Environment: For ceiling or horizontal structure * Applicable Model: AI PTZ Dome	85,00
	A81	<b>Recessed Mount</b> * Net Weight: 450g * Dimension: Ø168.7*91.3mm * Installation Environment: For in- ceiling installation * Applicable Model: AI Weather-proof Mini Dome (Only for cable out version)	85,00
	A82	<b>Recessed Mount</b> * Net Weight: 475g * Dimension: Ø168.7*91.3mm * Installation Environment: For in- ceiling installation * Applicable Model: AI IR Mini Dome	85,00
	A83	<b>Junction Box</b> * Net Weight: 270g * Dimension: Ø122*45.5mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering * Applicable Model: AI Weather-proof Mini Dome	38,00
	A84	<b>Junction Box</b> * Net Weight: 361.55g * Dimension: 145.5*167*47.6mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: AI Motorized Dome	47,00
	S45	<b>Solar Panel Modules</b> * Net Weight: 4.2kg * External Dimension: 580*385*69mm * MaximumPower- Pmax(W) 45W * Solar Panel + Bracket + Hoop (Without Battery Pack) * Installation Environment:For expanding solar energy receiving area to improve conversion efficiency * Applicable Model: 4G Solar-powered Traffic Sensing Camera	284,00
	S90	<b>Solar Panel</b> * Net Weight: 5.25kg * External Dimension: 585*830*30 mm * Installation Environment:For expanding solar energy receiving area to improve conversion efficiency * MaximumPower-Pmax(W) 90W * Applicable Model: Solar-powered Series camera	330,00
	B90	<b>Modular Battery</b> * Net Weight: 730g * External Dimension: 125*48*95 mm * Applicable Model: Solar-powered Series camera * Battery Capacity: 90Wh	369,00
	SPK1S90B36	<b>Solar Power Modules</b> * 4*90Wh Modular Battery + Bracket+ Battery box + Solar Panel S90 * Installation Environment:For expanding solar energy receiving area to improve conversion efficiency * Applicable Model: Solar-powered Series camera  * Optional: 6*90Wh Modular Battery + Bracket + Battery box+ Solar Panel S90: S606	2.190,00
	SPK1B36	<b>Solar Power Modules</b> * 4*90Wh Modular Battery + Bracket + Battery box * Installation Environment:For expanding solar energy receiving area to improve conversion efficiency * Applicable Model: Solar-powered Series camera  * Optional: 6*90Wh Modular Battery + Bracket + Battery box: S536	1.829,00
	ZM90M10-24S1	<b>Solar Power Modules</b> * Bracket*2 + Solar Panel S90*1 * Installation Environment:For expanding solar energy receiving area to improve conversion efficiency * Applicable Model: Solar-powered Series camera  * Optional: Bracket*2 + Solar Panel S90*2: S168	469,00
	SA02	<b>Wall Mount</b> * Applicable Model: Solar-powered Series camera	119,00

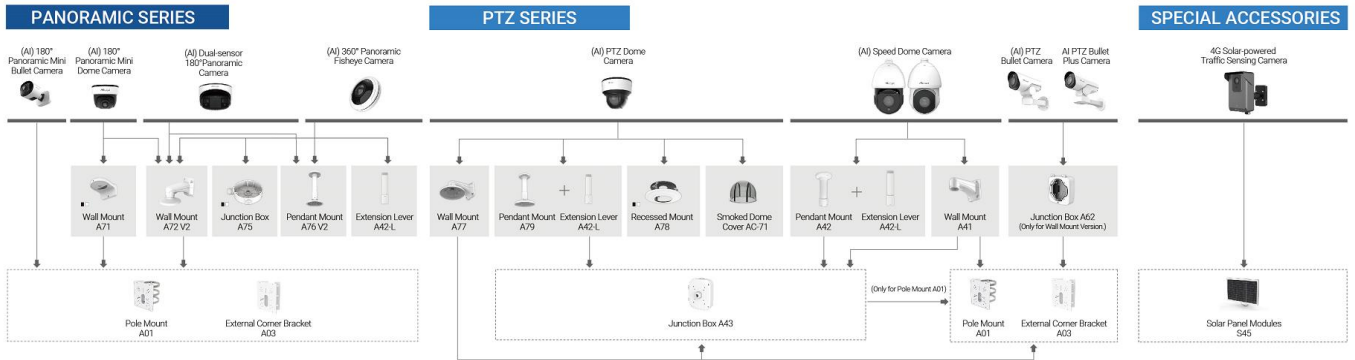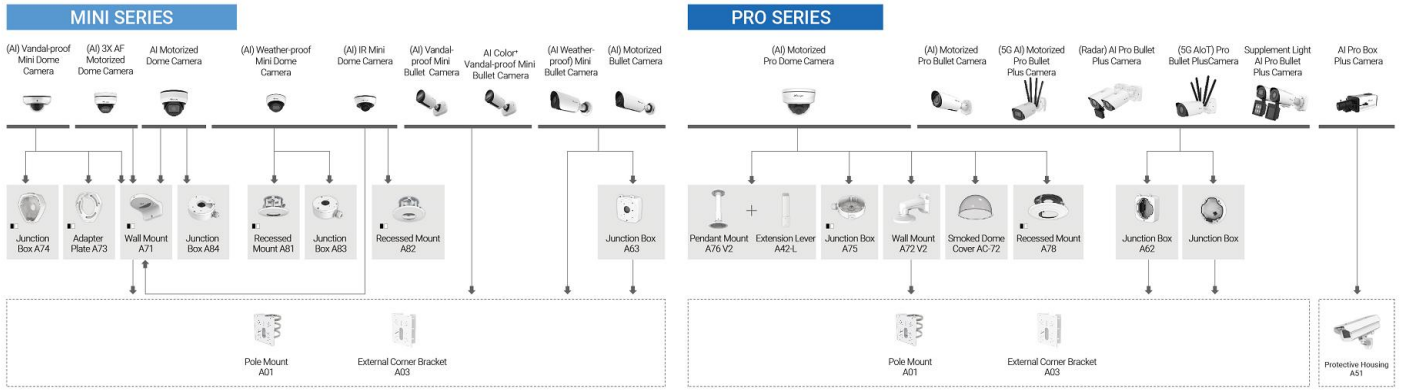

## Naming Convention Video Surveillance Camera

( Model ): **MS-C2966-R(T)F(I)PC --- AI Motorized Pro Bullet Plus Camera**

MS-C	2	9	66	-	R F I P E
Milesight Camera	Resolution	Sensor	Camera Type		Advanced Features
2 - 2MP		1 - 4K	21 - 4x5MP AI Multi-directional Camera		T - High Frame Rate (90fps/100fps)
4 - 4MP		2 - 4K (1/1.8")	41 - Speed Dome Camera		R - High Frame Rate (60fps)
5 - 5MP		3 - 5MP	52 - Pro Box Plus Camera		S - 20fps@ 4K Series
6-6MP		4 - 4MP (1/1.8")	67 - PTZ Bullet Plus Camera		X - Magnification of the lens e.g.: X42 - 42X AF lens
8 - 4K/8MP		5 - 4MP(1/2.8")	66 - Pro Bullet Plus Camera		F - Motorized Vari-focal lens
9 - 12MP		6 - 12MP	65 - 180° Panoramic Mini Bullet Camera		I - P-Iris Supported
		7-6MP(1/2.4")	64 - Vandal-proof Mini Bullet Camera		U - Full-color Supported
		8 - 2MP (1/2")	63 - Weather-proof Mini Bullet Camera		G - 5G Supported
		9 - 2MP	62 - Pro Bullet Camera		O - IoT Supported
			61 - PTZ Bullet Camera		P - PoE Supported
			77 - Dual-sensor 180° Panoramic Camera		K - Open Platform
			76 - 180° Panoramic Mini Dome Camera		GX - Platform Upgrade e.g.:G1 represents the first generation G2 represents the second generation
			75 - Weather-proof Mini Dome Camera		A/C/D/E- AI Platform
			74 - Fisheye Camera		
			73 - Vandal-proof Mini Dome Camera		
			72 - Pro Dome Camera		
			71 - PTZ Dome Camera		
			83 - IR Mini Dome Camera		

### Solar-powered Series

SP	11	1	4	1	LTE-NA	4mm
Milesight Camera	Camera Type	Hardware Version	Resolution	Sensor	Cellular Module	Lens
Solar Power	11- Bullet	1-First Generation	4-4MP	1-4MP(1/2.8")	LTE-NA -North America LTE-EU -Europe, the Middle East and Africa LTE-AU -Latin America, Australia and New Zealand	

### 4G Solar-powered Traffic Sensing Camera

( Model ): SC211-NA

SC	2	1	1-	NA
Series	Major Application Scenarios	Core Technology	Camera Type	4G Module Supported Region
Sensing Camera	2 - Intelligent Traffic	1 - Frame-based AI	(2_)1-4G Solar-powered Traffic Sensing Camera	NA -North America EU -Europe, the Middle East and Africa AU -Latin America, Australia and New Zealand

### Network Video Recorder

( Model ): MS-N7032-UPH --- 32-channel 4K H.265 PoE NVR

MS-N	7	032 -	U	P	H
1 - 2 * HDD (2.5") or 1 * HDD (3.5") 5 - 2 * HDD (3.5") 7 - 4 * HDD (3.5") 8 - 8 * HDD (3.5")	004 - 4-CH 008 - 8-CH 016 - 16-CH 032 - 32-CH 048 - 48-CH 064 - 64-CH	U - 4K	P - PoE	C/E/H/G - H.265 Compression	

### Enterprise NVR

( Model ):VE0602-A --- Enterprise NVR with 32-CH License, 6 Disk Slots.

VE	12	08	-	S
Enterprise NVR	Disk Slot	Camera License		Server Chassis
	01-1*(2.5" or 3.5")Slots 02-2*(2.5" or 3.5")Slots 04-16*(2.5" or 3.5")Slots 06-6*(2.5" or 3.5")Slots 12-12*3.5" Slots 16-16*3.5" Slots	00 - 8-CH 01 - 16-CH 02 - 32-CH 04 - 64-CH 08 - 128-CH		A - Enterprise NVR S -Enterprise NVR Storage Server

### PoE Switch

( Model ): MS-S0224-GL --- 24-port PoE Switch

MS-S	02	24 -	G	L
02 - 2 * Uplink Ports 04 - 4 * Uplink Ports	04 - 4 * PoE Ports 08 - 8 * PoE Ports 16 - 16 * PoE Ports 24 - 24 * PoE Ports	E - 10/100 Mbps Uplink Port G - Gigabit Uplink Port	F - Optical Fiber Port (SFP) L - Extend Mode	

### IP Speaker

( Model ): MS-WS15P

MS-W	S	15	P
	IP Speaker	Rate Power	P -POE Supported
		15-15W 30 -30W	

### CCTV Router

( Model ): UR32 - L04EU-G-P-W-RS485

UR32	L	04	EU	G-P-W	- RS485
Model Name	Cellular Network Type	Modem Manufacturer & Model	Operating Region	Function	(For UR32 Only) Add RS-485 Serial Interface
UR32S	L: 4G LTE		EU: EMEA/Pacific Asia (5G) AU: South America and Australia AF: North America FirstNet AE: Asia/Europe/Australia GL: Global	G: GPS P: PoE W: Wi-Fi	
UR32	S: 5G				
UR35					
UR75					
UF31					
UF51					